


Sideshifting fork positioner

RZV-S
ISO IV

constant sideshift, no forks

The **sideshifting fork positioner RZV-S** uses stable round bar guides for positioning of forks. The simple design offers reliability and excellent operator visibility. Hook-on forks can be used. The constant sideshift operates at any fork position.

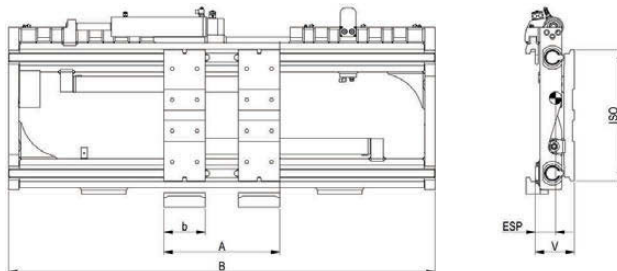


type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	b (forks) mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
RZV 50-S	5000/600	5,0/600	IV	1250 1350 1450 1550	490-1330 490-1430 490-1530 490-1630	140	+/-100	180	73	345 357 383 409
RZV 60-S	6000/600	6,0/600		1360 1460 1600 1660 1860	560-1460 560-1560 560-1700 560-1760 560-1960	150	+/- 100 +/- 100 +/- 160 +/- 160 +/- 160	190	75	490 510 540 550 590
RZV 70-S	7000/600	6,5-7,0/600		1460 1860 2060	560-1560 560-1960 560-2160	150	+/- 100 +/- 160 +/- 160	190	73	520 595 645
RZV 80-S	8000/600	8,0/600		1460 1800 1860 2000 2060 2160 2260 2400	560-1560 560-1900 560-1960 560-2100 560-2160 560-2260 560-2360 560-2500	200	+/- 100 +/- 160 +/- 160 +/- 160 +/- 160 +/- 160 +/- 160 +/- 160	190	72	540 590 600 605 650 670 690 740
RZV 100-S	8000/900	8,0/900		2060 2160 2260 2400	560-2160 560-2260 560-2360 560-2500	200	+/- 160	216	70	800 830 855 910
RZV 110-S	8000/1100	8,0/1100		2060 2260 2400	560-2160 560-2360 560-2500	200	+/- 160	218	72	820 875 930


- 2 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard
- for hook-on forks ISO 2328
- bolt-on forks can be used

- forks not included
- please indicate fork width when ordering
- load backrest/protection strip see page 240

- quick release hooks (ISO IV) upon request
- for forks up to 2400 mm, longer please ask
- clamping of goods not allowed

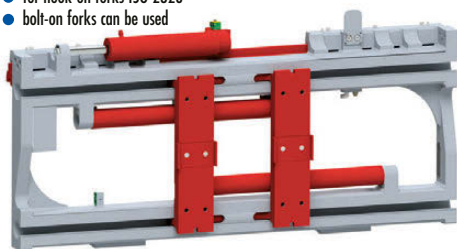

fork lock



option: protection strip

DURWEN
Forklift Attachments

More than 75 years experience