


# Telescopic forks

**RZV-S-TGZ**  
**ISO II**

with fork positioner and constant sideshift

The **RZV-S-TGZ** is a combination of fork positioner and telescopic forks that enables quick and cost effective loading and stacking especially when loading and unloading from one side of a vehicle. The unit copes with a variety of logistical needs including different pallet sizes and load dimensions. The telescopic forks feature 100% synchronised reach movement for ease of use. Fork pockets feature +2mm wear resistant mangan steel wear zone as standard.

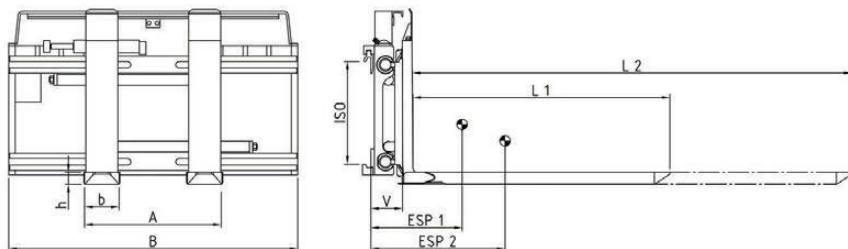

| type                                   | capacity<br>kg/<br>LC 1 mm | capacity<br>kg/<br>LC 2 mm | lift truck<br>to/<br>LC mm | ISO | B<br>mm      | A<br>mm              | retracted<br>extended<br>L1/L2 mm | fork<br>b x h<br>mm | fork<br>back<br>mm | sideshift<br>mm | V<br>LLC<br>mm | ESP/COG<br>1/2<br>mm | weight<br>kg |
|----------------------------------------|----------------------------|----------------------------|----------------------------|-----|--------------|----------------------|-----------------------------------|---------------------|--------------------|-----------------|----------------|----------------------|--------------|
| RZV-S-TGZ.20.1200<br>RZV-S-TGZ.20.1350 | 2000/500                   | 950/1450<br>810/1750       | 1,0-<br>2,0/500            | II  | 1040         | 500-1130             | 1200/2050<br>1350/2350            | 131 x 57            | 120x45             | +/- 100         | 142            | 315/415<br>360/485   | 348<br>362   |
| RZV-S-TGZ.22.1200                      | 2000/500                   | 950/1450                   | 1,0-<br>2,0/500            |     | 1040<br>1150 | 530-1160<br>530-1270 | 1200/2050                         | 161 x 57            | 150x45             |                 |                | 340/455<br>330/445   | 382<br>390   |
| RZV-S-TGZ.22.1350                      | 2000/500                   | 810/1750                   | 1,0-<br>2,0/500            |     | 1040<br>1150 | 530-1160<br>530-1270 | 1350/2350                         | 161 x 57            | 150x45             |                 |                | 385/535<br>380/525   | 400<br>408   |
| RZV-S-TGZ.25.1200                      | 2500/600                   | 1200/1450                  | 2,0-<br>2,5/600            |     | 1040<br>1150 | 530-1160<br>530-1270 | 1200/2050                         | 161 x 57            | 150x45             |                 |                | 335/455<br>330/445   | 384<br>392   |
| RZV-S-TGZ.25.1350                      | 2500/600                   | 1000/1750                  | 2,0-<br>2,5/600            |     | 1040<br>1150 | 530-1160<br>530-1270 | 1350/2350                         | 161 x 57            | 150x45             |                 |                | 385/530<br>380/525   | 400<br>410   |

- 3 hydraulic functions required
- includes hoses and couplings
- protection strip with integrated hose guide as standard
- standard with easily replaceable wear zones and fork tip made of solid steel to reduce service costs
- thicker mangan steel wear zone (+6 mm) ISO II upon request

- hook-on TGZ ISO 2328 as standard
- bolt-on forks ISO II upon request (drilling pattern changes, please ask)
- pallet stop ISO II (see page 198) upon request:
  - A) 75 mm on the fork pocket sides
  - B) 400 mm
  - C) 850 mm
- type B and C reduce the useable length by 50 mm
- different pallet stop positions upon request
- solenoid valve upon request (12 V, 24 V, 48 V, 80 V - please specify)
- for ISO type B mounting (ISO II) upon request

