
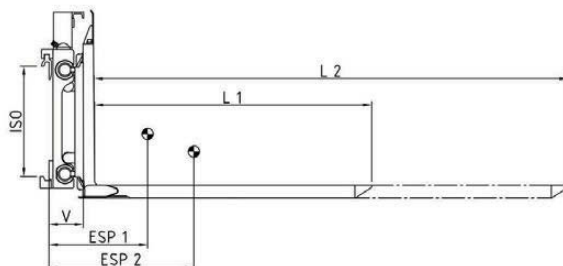


Telescopic forks

RZV-S-TGZ
ISO IV

with fork positioner and constant sideshift

The **RZV-S-TGZ** is a combination of fork positioner and telescopic forks that enables quick and cost effective loading and stacking especially when loading and unloading from one side of a vehicle. The unit copes with a variety of logistical needs including different pallet sizes and load dimensions. The telescopic forks feature 100% synchronised reach movement for ease of use. Fork pockets feature +2mm wear resistant mangan steel wear zone as standard.



type	capacity kg/ LC 1 mm	capacity kg/ LC 2 mm	lift truck to/ LC mm	ISO	B mm	A mm	retracted extended L1/L2 mm	fork b x h mm	fork back mm	sideshift mm	V LLC mm	ESP/COG 1/2 mm	weight kg
RZV-S-TGZ.50.1200 RZV-S-TGZ.50.1350	5000/600	2300/1450 1900/1750	5,0/600	IV	1350	510-1450	1200/2050 1350/2350	161x62	150x50	+/- 100	180	270/345 305/400	640 660
RZV-S-TGZ.60.1200	6000/600	3100/1450	6,0/600		1460 1860	625-1625 625-2025	1200/2050	215x69	200x50	+/- 100 +/- 160	190	280/365 275/355	935 965
RZV-S-TGZ.60.1350	6000/600	2570/1750	6,0/600		1460 1860	625-1625 625-2025	1350/2350	215x69	200x50	+/- 100 +/- 160	190	315/425 305/415	965 995

- 3 hydraulic functions required
- includes hoses and couplings
- protection strip with integrated hose guide as standard
- standard with easily replaceable wear zones and fork tip made of solid steel to reduce service costs

- thicker mangan steel wear zone (+6 mm) ISO IV upon request
- hook-on TGZ ISO 2328 as standard
- bolt-on forks ISO IV upon request (drilling pattern changes, please ask)
- pallet stop ISO IV (see page 198) upon request:
 - A) 75 mm on the fork pocket sides
 - B) 400 mm
 - C) 850 mm
 type B and C reduce the useable length by 50 mm
- different pallet stop positions upon request
- solenoid valve upon request (12 V, 24 V, 48 V, 80 V - please specify)
- ISO type B mounting (ISO IV) upon request

