


Telescopic forks

RZV-TGZ
ISO II/III

with fork positioner, no sideshift

The **RZV-TGZ** is a combination of fork positioner and telescopic forks that enables quick and cost effective loading and stacking especially when loading and unloading from one side of a vehicle. The unit copes with a variety of logistical needs including different pallet sizes and load dimensions. The telescopic forks feature 100% synchronised reach movement for ease of use. Fork pockets feature +2mm wear resistant mangan steel wear zone as standard.

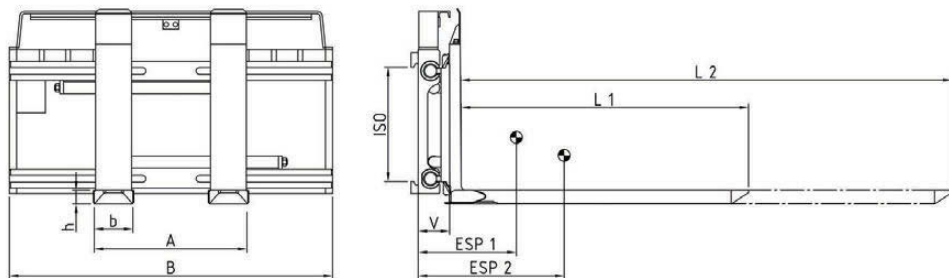

type	capacity kg/ LC 1 mm	capacity kg/ LC 2 mm	lift truck to/ LC mm	ISO	B mm	A mm	retracted extended L1/L2 mm	fork b x h mm	fork back mm	V LLC mm	ESP/COG 1/2 mm	weight kg
RZV-TGZ.20.1200 RZV-TGZ.20.1350	2000/500	950/1450 810/1750	1,0-2,0/500	II A	1040 1150	500-1130	1200/2050 1350/2350	131x57	120x45	126	320/425 365/500	326 340
RZV-TGZ.25.1200	2500/600	1200/1450	2,0- 2,5/600	II A	1040 1150	530-1160 530-1270	1200/2050	161x57	150x45	126	340/465 330/455	365 372
RZV-TGZ.25.1350	2500/600	1000/1750	2,0- 2,5/600	II A	1040 1150	530-1160 530-1270	1350/2350	161x57	150x45	126	390/545 380/535	380 388
RZV-TGZ.35.1200	3500/500	1630/1450	3,0- 3,5/500	III A	1040 1150	510-1140 510-1250	1200/2050	161x57	150x45	138	320/430 320/425	406 415
RZV-TGZ.35.1350	3500/500	1390/1750	3,0- 3,5/500	III A	1040 1150	510-1140 510-1250	1350/2350	161x57	150x45	138	365/505 360/500	425 430
RZV-TGZ.40.1200	4000/500	1850/1450	3,5/600- 4,0/500	III A	1150 1350	510-1250 510-1450	1200/2050	161x57	150x45	153	300/400 290/390	458 476
RZV-TGZ.40.1350	4000/500	1550/1750	3,5/600- 4,0/500	III A	1150 1350	510-1250 510-1450	1350/2350	161x57	150x45	153	340/465 335/455	474 492
RZV-TGZ.45.1200 RZV-TGZ.45.1350	5000/600	2300/1450 1900/1750	4,0- 5,0/600	III A	1350	510-1450	1200/2050 1350/2350	161x62	150x50	153	310/405 350/470	500 518

- 2 hydraulic functions required (3 hydraulic functions integral sideshift)
- includes hoses and couplings
- protection strip with integrated hose guide as standard
- standard with easily replaceable wear zones and fork tip made of solid steel to reduce service costs
- thicker mangan steel wear zone (+6 mm) ISO II/III upon request
- hook-on TGZ ISO 2328 as standard
- bolt-on forks upon request (drilling pattern changes, please ask)
- integral sideshift upon request

- pallet stop ISO II/III (see page 198) upon request:
 - A) 75 mm on the fork pocket sides
 - B) 400 mm
 - C) 850 mm
- type B and C reduce the useable length by 50 mm
- different pallet stop positions upon request
- solenoid valve upon request (12 V, 24 V, 48 V, 80 V - please specify)
- ISO type B mounting upon request (ISO II/III)