


Hydraulic telescopic fork arms

TGZ
ISO II/III

The hydraulic telescopic fork arms **TGZ** are the ideal solution for many transport and loading applications. Vehicles can be loaded and unloaded from one side. The telescopic forks feature 100% synchronised reach movement for ease of use. This feature further supports excellent visibility and simple installation. Fork pockets feature +2mm wear resistant mangan steel wear zone as standard.

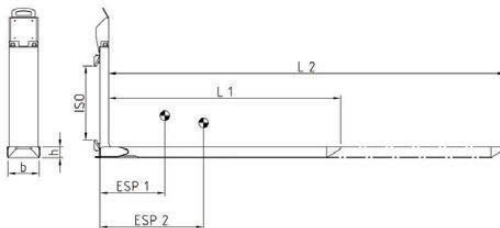

type	capacity kg LC 1 mm	capacity kg LC 2 mm	lift truck to LC mm	ISO	retracted/extended L1/L2 mm	b x h mm	fork back B x V mm	ESP 1/ESP 2 COG 1/COG 2 mm	H mm	weight set kg	
1-cylinder model											
TGZ.17.800* TGZ.17.1000* TGZ.17.1200*	1700/600	1020/1000 850/1200 720/1400	1,0-1,6/500	II	800/1200 1000/1600 1200/2000	130 x 40	120 x 40	230/295 310/410 400/530	710	100 112 126	
TGZ.20.800 TGZ.20.1000 TGZ.20.1200 TGZ.20.1350	2000/600	1450/850 1060/1250 950/1450 810/1750	1,0-2,0/600		800/1250 1000/1650 1200/2050 1350/2350	131 x 57	120 x 45	270/355 345/495 432/620 500/750	720	128 150 168 184	
2-cylinder model											
TGZ.25.1000 TGZ.25.1200 TGZ.25.1350	2500/600	1450/1150 1200/1450 1000/1750	1,0-2,5/600		II	1000/1650 1200/2050 1350/2350	161 x 57	150 x 45	340/500 423/645 495/760	774	188 207 217
TGZ.35.1200 TGZ.35.1350	3500/500	1630/1450 1390/1750	3,0-3,5/500		III	1200/2050 1350/2350	161 x 57	150 x 45	403/613 467/721	879	216 230
TGZ.40.1200 TGZ.40.1350	4000/500	1850/1450 1550/1750	3,5/600- 4,0/500	III	1200/2050 1350/2350	161 x 57	150 x 45	406/619 472/729	879	219 235	
TGZ.48.1200 TGZ.48.1350	5000/600	2300/1450 1900/1750	4,5-5,0/600	III	1200/2050 1350/2350	161 x 62	150 x 50	405/605 465/705	879	240 254	


- 1 hydraulic function required
 - includes hoses and couplings
 - standard with easily replaceable wear zones and fork tip made of solid steel to reduce service costs
 - thicker mangan steel wear zone (+6 mm) ISO II/III upon request
 - ISO type B mounting upon request (ISO II/III)
 - pallet stop ISO II/III (see page 198) upon request:
 - A) 75 mm on the fork pocket sides
 - B) 400 mm
 - C) 850 mm
 type B and C reduce the useable length by 50 mm
 - different pallet stop positions upon request
 - standard colour: dark grey
 - low built height TGZ available upon request
 - reinforced lower hooks for greater stability
TGZ 17, 20 = 110 mm wide, TGZ 25-48 = 140 mm wide
 - *TGZ 17 features external flow divider valve.
Installation at customer required.
- Please note: standard load backrest does not fit with TGZ installed.

1 cylinder model TGZ 17

- 1 cylinder per fork arm
- synchronised fork travel
- external flow divider
- minimal height
- easy pick front end

1 cylinder model TGZ 20

- 1 cylinder per fork arm
- 100% synchronised fork travel
- less weight and smaller width
- operates fully loaded



2 cylinder model TGZ 25 - 60

- 2 cylinders per fork arm
- 100% synchronised fork travel
- powerfull extension and retraction
- operates fully loaded

DURWEN
Forklift Attachments

More than 75 years experience