


# Carton clamp, rigid arms

**UKKS**

integral sideshift

The **carton clamp UKKS** with rigid arms is designed for the loading/unloading of well packed goods without pallets. The slim arm design allows for easy picking of densely standing goods.

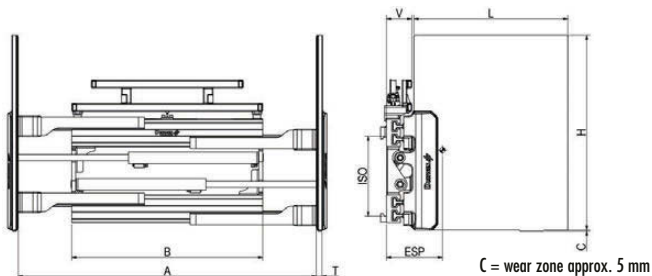


| type    | capacity<br>kg<br>LC mm                                              | lift truck<br>to<br>LC mm              | ISO | B<br>mm                                | A<br>ITI<br>mm                               | arm length*<br>L<br>mm   | arm height<br>H<br>mm | arm<br>thickness T<br>mm | V<br>LLC<br>mm | ESP<br>COG<br>mm         | weight<br>kg             |
|---------|----------------------------------------------------------------------|----------------------------------------|-----|----------------------------------------|----------------------------------------------|--------------------------|-----------------------|--------------------------|----------------|--------------------------|--------------------------|
| UKKS 10 | 700/500                                                              | 1,0-1,5/500                            | II  | 880                                    | 400-1430<br>400-1430                         | 700<br>800               | 1000                  | 28                       | 130            | 260<br>270               | 450<br>470               |
|         |                                                                      |                                        |     | 980                                    | 400-1520<br>400-1520<br>500-1720<br>500-1720 | 700<br>800<br>700<br>800 |                       |                          |                | 265<br>275<br>260<br>280 | 470<br>490<br>475<br>495 |
| 980     | 340-1400<br>340-1400<br>400-1520<br>400-1520<br>500-1720<br>500-1720 | 700<br>800<br>700<br>800<br>700<br>800 |     | 275<br>285<br>270<br>280<br>270<br>280 | 470<br>480<br>475<br>485<br>480<br>490       |                          |                       |                          |                |                          |                          |
| 1050    | 400-1590<br>400-1590<br>500-1790<br>500-1790                         | 700<br>800<br>700<br>800               |     | 260<br>270<br>265<br>275               | 490<br>500<br>495<br>505                     |                          |                       |                          |                |                          |                          |
| 1150    | 400-1690<br>400-1690<br>500-1890<br>500-1890                         | 700<br>800<br>700<br>800               |     | 260<br>270<br>255<br>265               | 510<br>520<br>515<br>525                     |                          |                       |                          |                |                          |                          |

- 2 hydraulic functions required
- includes hoses and couplings
- pressure gauge as standard
- with protection strip as standard

- supergrip black as standard surface
- other surfaces see page 59
- for ISO type B mounting upon request
- clamp force options see page 241

\* Arm length equals the usable length from the arm tip to the load contact on the clamp body

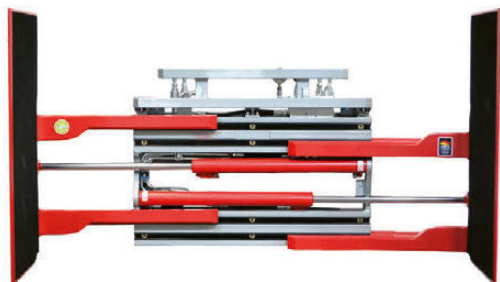

**DURWEN**   
Forklift Attachments

More than 75 years experience

PL 01-2024