


Appliance clamp

UKK-PSE
UKK-PSD

articulating arms, integral sideshift

Appliance clamp UKK-PSD has one rigid arm for accurate knifing of goods and one arm triple articulating for optimized pressure distribution. **Appliance clamp UKK-PSE** has one arm rigid and one arm with single articulation.

image shows PSE

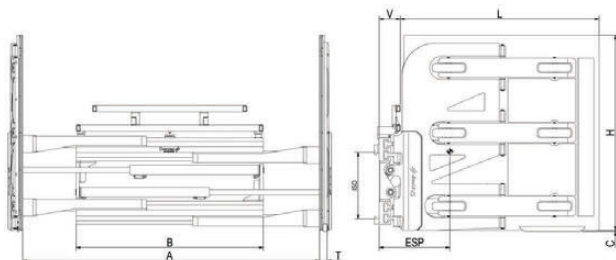

C = wear zone approx. 5 mm

• PSE = 1 arm rigid, 1 arm single articulating

● PSE = 1 arm rigid, 1 arm single articulating											
type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A ITI mm	arm length* L mm	arm height H mm	arm thickness T mm	V LLC mm	ESP COG mm	weight kg
UKK 15-PSE	1000/600	1,5-1,8/500	II	1150	440-1820	1220	1200	60	130	450	760
				1150	440-1820	1380				475	820
UKK 25-PSE	1300/600	2,0-2,5/600		1150	440-1820	1220				445	775
				1150	440-1820	1380				470	835
				1350	440-2020	1220				440	805
			1350	440-2020	1380	465	865				

• PSD = 1 arm rigid, 1 arm triple articulating

• PSD = 1 arm rigid, 1 arm triple articulating											
type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A ITI mm	arm length* L mm	arm height H mm	arm thickness T mm	V LLC mm	ESP COG mm	weight kg
UKK 15-PSD	1000/600	1,5-1,8/500	II	1150 1150	440-1820 440-1820	1220 1380	1200	60	130	455 480	765 825
UKK 25-PSD	1300/600	2,0-2,5/600		1150	440-1820	1220				450	780
				1150	440-1820	1380				475	840
				1350	440-2020	1220				445	810

- 2 hydraulic functions required
- includes hoses and couplings
- pressure gauge as standard
- with pressure relief valve on the clamp function as standard
- with protection strip as standard
- supergrip black as standard surface
- other surfaces see page 59
- for ISO type B mounting upon request

- clamp force options see page 241
- other arm dimensions upon request
- constant sideshift upon request

* Arm length equals the usable length from the arm tip to the load contact on the clamp body, contact plate length - 20 mm

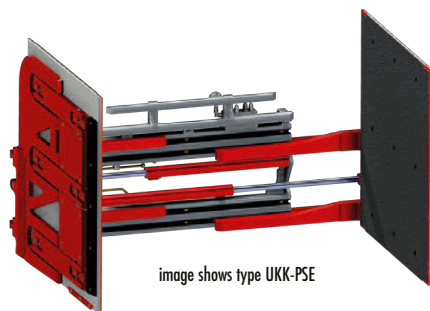


image shows type UKK-PSE



DURWEN
Forklift Attachments

More than 75 years experience