


Reach truck fork positioner

ZVP-H

Wide opening, enlarged ground clearance, no loss of lift height

no sideshift, bolt-on fork

The **fork positioner ZVP-H** can spread the forks beyond the frame width. It is ideal for long goods or very wide pallets. Due to the enlarged ground clearance the attachment frame is above the reach truck wheel legs. With the mounting being designed to meet the regular mounting height of the reach truck no lift height will be lost. Clamping of goods is not allowed.

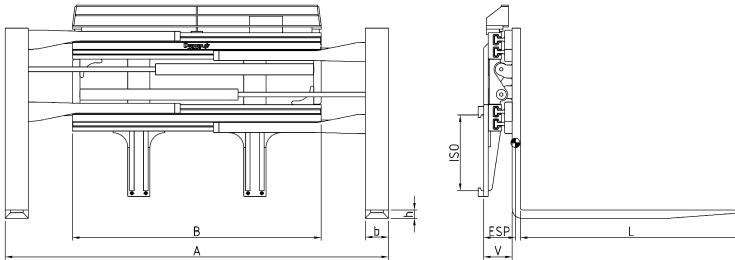

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A OTO mm	forks b x h x L mm	V LLC mm	ESP COG mm	weight kg
ZVP 15-H	1500/500	1,0-1,5/500	II	1150	560-1880	100x45x1200	159	215	530
				1200	560-1930			213	540
				1250	560-1980			210	545
				1350	560-2080			205	560
ZVP 25-H	2500/600	1,6-2,5/600		1150	560-1880	125x50x1200		220	580
				1200	560-1930			218	590
				1250	560-1980			215	595
				1350	560-2080			210	610

- 1 hydraulic function required
(2 hydraulic functions with integral sideshift)
- includes hoses and couplings
- protection strip as standard
- integral sideshift upon request
- no clamping allowed
- LLC spacer kit upon request (can increase LLC in steps up to 50 mm)
- solenoid valve upon request (12 V, 24 V, 48 V, 80 V - please specify)

- maximal fork length type ZVP-H 1200 mm, other length upon request
- longer fork drop for ZVP 15 and 25 upon request
- load backrest type LS-K see page 239

Important note: The reach truck must be equipped with a collision prevention that prevents collision of fork positioner parts with the wheel legs or parts of the reach truck. This means usually that fork positioning and sideshift must be shut off with the attachment between the wheel legs. The reach truck carriage design must accommodate the mounting of an attachment. A spacer kit is available from Durwen. It allows the extension of the attachment mounting up to 50 mm giving extra space for carriage parts or reach truck parts that may protrude into the attachment mounting or operation space.

