


# Sideshifting fork positioner

**ZVP**  
**ISO II/III**

integral sideshift, bolt-on forks

The **sideshifting fork positioner ZVP** is designed to allow fork spread beyond the width of the carriage. This flexible feature is ideal in situations where space is important. A huge variety of loads can be handled with extreme efficiency. This strong and durable attachment has excellent visibility and minimised lost load centre with the use of innovative double T / E profiles. The attachment is equipped with integral sideshift and bolt-on forks as standard. Clamping of goods is not allowed with this attachment.

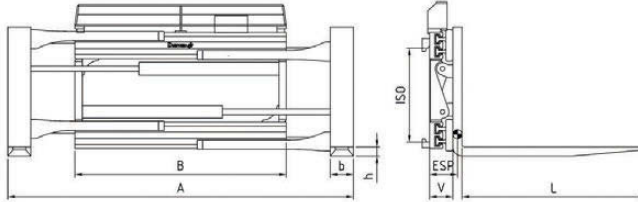

| type   | capacity<br>kg<br>LC mm | lift truck<br>to<br>LC mm | ISO | B<br>mm                                                             | A<br>OTO<br>mm                                                                                           | forks<br>b x h x L<br>mm | V<br>LLC<br>mm | ESP<br>COG<br>mm                                            | weight<br>kg                                                |
|--------|-------------------------|---------------------------|-----|---------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|--------------------------|----------------|-------------------------------------------------------------|-------------------------------------------------------------|
| ZVP 15 | 1500/500                | 1,0-1,5/500               | II  | 880<br>980<br>1050                                                  | 560-1610<br>560-1710<br>560-1780                                                                         | 100x40x1200              | 126            | 220<br>213<br>205                                           | 305<br>315<br>325                                           |
| ZVP 20 | 2000/500                | 1,6-2,0/500               | II  | 980<br>1050<br>1150                                                 | 560-1710<br>560-1780<br>560-1880                                                                         | 100x45x1200              | 126            | 220<br>212<br>205                                           | 330<br>340<br>360                                           |
| ZVP 25 | 2500/600                | 2,0-2,5/600               | II  | 980<br>1050<br>1050<br>1080<br>1150<br>1150<br>1150<br>1200<br>1400 | 560-1710<br>560-1780<br>360-1380<br>560-1810<br>560-1880<br>420-1600<br>320-1400<br>560-1930<br>560-2130 | 125x45x1200              | 131            | 238<br>228<br>228<br>227<br>222<br>220<br>218<br>215<br>200 | 390<br>400<br>395<br>405<br>415<br>413<br>410<br>422<br>455 |
| ZVP 30 | 3000/500                | 3,0/500                   | III | 980<br>1000<br>1050<br>1150<br>1150<br>1200<br>1300<br>1350<br>1450 | 560-1710<br>560-1730<br>560-1780<br>560-1880<br>420-1600<br>560-1930<br>560-2030<br>560-2080<br>560-2180 | 125x45x1200              | 131            | 227<br>226<br>223<br>215<br>217<br>216<br>212<br>210<br>200 | 405<br>407<br>415<br>430<br>425<br>438<br>452<br>460<br>478 |
| ZVP 35 | 3500/500                | 3,0/600-<br>3,5/500       | III | 1150<br>1250<br>1350                                                | 560-1880<br>560-1980<br>560-2080                                                                         | 140x50x1200              | 136            | 242<br>240<br>238                                           | 485<br>505<br>525                                           |
| ZVP 40 | 4000/500                | 3,5/600-<br>4,0/500       | III | 1150<br>1250<br>1350<br>1450                                        | 550-1860<br>550-1960<br>550-2060<br>550-2160                                                             | 140x50x1200              | 138            | 220<br>217<br>213<br>210                                    | 585<br>605<br>620<br>638                                    |
| ZVP 45 | 5000/500                | 4,0/600-<br>5,0/500       | III | 1150<br>1250<br>1350<br>1450<br>1550                                | 550-1860<br>550-1960<br>550-2060<br>550-2160<br>550-2260                                                 | 150x60x1200              | 148            | 220<br>217<br>215<br>213<br>210                             | 630<br>645<br>665<br>680<br>700                             |
| ZVP 48 | 5000/600                | 5,0/600                   | III | 1350<br>1450                                                        | 550-2060<br>550-2160                                                                                     | 150x60x1200              | 158            | 205<br>200                                                  | 690<br>715                                                  |

- 2 hydraulic functions required
- includes hoses and couplings
- with protection strip as standard

- load backrest type LS-K see page 239

**DURWEN**  
Forklift Attachments

More than 75 years experience