


Sideshifting fork positioner

integral sideshift, bolt-on forks

The sideshifting fork positioner ZVP is designed to allow fork spread beyond the width of the carriage. This flexible feature is ideal in situations where space is important. A huge variety of loads can be handled with extreme efficiency. This strong and durable attachment has excellent visibility and minimised lost load centre with the use of innovative double T / E profiles. The attachment is equipped with integral sideshift and bolt-on forks as standard. Clamping of goods is not allowed with this attachment.

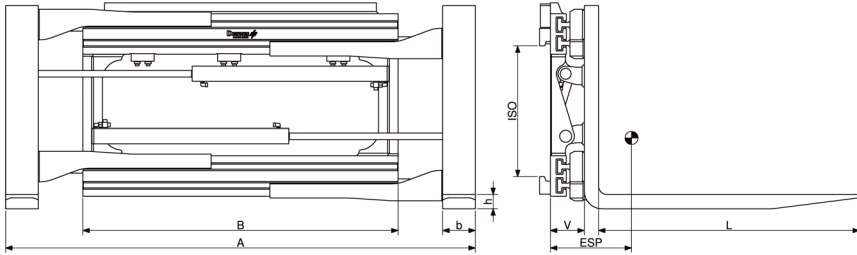

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A OTO mm	forks b x h x L mm	V LLC mm	ESP COG mm	weight kg
ZVP 50	5000/600	5,0/600	IV	1250	550-1960	150x60x1200	158	225	755
				1350	550-2060			223	775
				1450	550-2160			218	790
				1550	550-2260			206	810
				1800	550-2510			195	860
ZVP 60	6000/600	6,0/600		1300	550-2010	150x65x1200	158	235	790
				1450	550-2160			230	815
				1550	550-2260			220	830
				1750	550-2460			215	880
				1800	550-2510			205	895
ZVP 80	8000/600	7,0-8,0/600		2000	550-2710	200x70x1200	177	190	990
				1350	560-2060			245	1245
				1750	560-2460			230	1350
				1800	560-2510			228	1370
				1850	560-2560			225	1390
				1950	560-2660			220	1430
				2000	560-2710			215	1450
ZVP 100	8000/900	8,0/900		2200	560-2910	200x80x1200	185	210	1510
				1950	560-2600			225	1580
				2000	560-2650			222	1610
				2100	560-2750			220	1640
ZVP 110	8000/1100	8,0/1100		2200	560-2850	200x80x1200	195	215	1680
				2400	560-3050			215	1770
				2200	560-2750			230	1940
				2400	560-2950	225	2070		



- 2 hydraulic functions required
- includes hoses and couplings
- load backrest type LS-K see page 239