


# Sideshifting fork positioner

**ZVP-S**  
**ISO III**


constant sideshift, bolt-on forks

**The sideshifting fork positioner ZVP-S** is designed to allow fork spread beyond the width of the carriage. This flexible feature is ideal in situations where space is important. A huge variety of loads can be handled with extreme efficiency. This strong and durable attachment has excellent visibility and minimised lost load centre with the use of innovative double T / E profiles. The attachment is equipped with constant sideshift and bolt-on forks as standard. Clamping of goods is not allowed with this attachment.

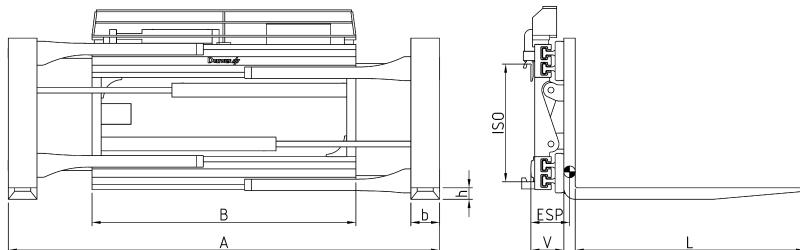

| type     | capacity<br>kg<br>LC mm | lift truck<br>to<br>LC mm | ISO | B<br>mm                                                             | A<br>OTO<br>mm                                                                                           | forks<br>b x h x L<br>mm | sideshift<br>mm | V<br>LLC<br>mm | ESP<br>COG<br>mm                                            | weight<br>kg                                                |
|----------|-------------------------|---------------------------|-----|---------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|--------------------------|-----------------|----------------|-------------------------------------------------------------|-------------------------------------------------------------|
| ZVP 30-S | 3000/500                | 3,0/500                   | III | 980<br>1000<br>1050<br>1150<br>1150<br>1200<br>1300<br>1350<br>1450 | 560-1710<br>560-1730<br>560-1780<br>560-1880<br>440-1640<br>560-1930<br>560-2030<br>560-2080<br>560-2180 | 125x45x1200              | +/- 100         | 148            | 217<br>217<br>213<br>205<br>212<br>209<br>202<br>200<br>195 | 425<br>427<br>435<br>450<br>446<br>458<br>472<br>480<br>497 |
| ZVP 35-S | 3500/500                | 3,0/600-<br>3,5/500       |     | 1150<br>1250<br>1350                                                | 560-1880<br>560-1980<br>560-2080                                                                         | 140x50x1200              |                 |                | 232<br>230<br>228                                           | 505<br>525<br>545                                           |
| ZVP 40-S | 4000/500                | 3,5/600-<br>4,0/500       |     | 1150<br>1250<br>1350<br>1450                                        | 550-1860<br>550-1960<br>550-2060<br>550-2160                                                             | 140x50x1200              |                 | 155            | 210<br>206<br>203<br>198                                    | 625<br>642<br>660<br>678                                    |
| ZVP 45-S | 5000/500                | 4,0/600-<br>5,0/500       |     | 1150<br>1250<br>1350<br>1450<br>1550                                | 550-1860<br>550-1960<br>550-2060<br>550-2160<br>550-2260                                                 | 150x60x1200              |                 |                | 205<br>204<br>203<br>202<br>201                             | 680<br>700<br>720<br>740<br>760                             |
| ZVP 48-S | 5000/600                | 5,0/600                   |     | 1350<br>1450<br>1550                                                | 550-2060<br>550-2160<br>550-2260                                                                         | 150x60x1200              |                 | 175            | 195<br>193<br>190                                           | 790<br>800<br>810                                           |

- 2 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard
- sideshift bottom rollers as standard
- with protection strip as standard
- load backrest type LS-K see page 239

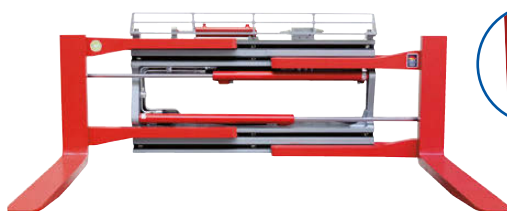

forks bolted from the rear

**DURWEN**  
Forklift Attachments

More than 75 years experience