


Fork positioner

ZVP-S-TGZ
ISO III

telescopic forks, constant sideshift

The **ZVP-S-TGZ** is a combination of fork positioner and telescopic forks that enables quick and cost effective loading and stacking especially when loading and unloading from one side of a vehicle. The unit copes with a variety of logistical needs including different pallet sizes and load dimensions. The telescopic forks feature 100% synchronised reach movement for ease of use. As this fork positioner spreads the forks beyond the frame width, it is ideal for handling wide goods and pallets. Clamping not allowed. Fork pockets feature +2mm wear resistant mangan steel wear zone as standard.

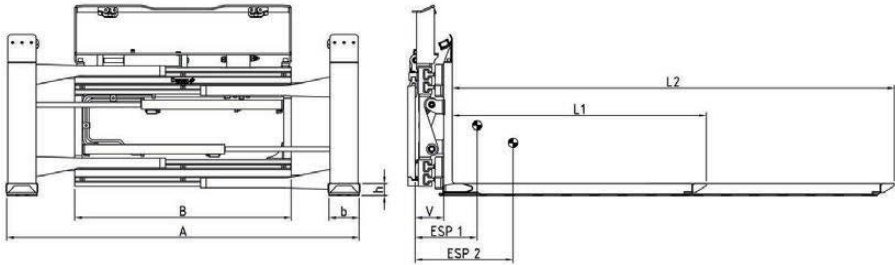

type	capacity kg/ LC 1 mm	capacity kg/ LC 2 mm	lift truck to/ LC mm	ISO	B mm	A mm	retracted extended L1/L2 mm	fork b x h mm	fork back mm	sideshift mm	V LLC mm	COG 1/ COG 2 mm	weight kg
ZVP-S-TGZ.35.1200	3500/500	1630/1450	3,5/500	III	1050 1150	560-1780 560-1880	1200/2050	161x57	150x45	+/- 100	153	290/375 285/370	545 555
ZVP-S-TGZ.35.1350	3500/500	1390/1750	3,5/500		1050 1150	560-1780 560-1880	1350/2350	161x57			153	330/440 325/435	561 571
ZVP-S-TGZ.40.1200	4000/500	1850/1450	4,0/500		1150 1350	550-1860 550-2060	1200/2050	161x57			155	250/320 240/310	680 715
ZVP-S-TGZ.40.1350	4000/500	1550/1750	4,0/500		1150 1350	550-1860 550-2060	1350/2350	161x57			155	285/370 275/360	700 733
ZVP-S-TGZ.45.1200	5000/500	2300/1450 1900/1750	5,0/500		1350	550-2060	1200/2050 1350/2350	161x62	150x50		165	230/285 255/320	830 846
ZVP-S-TGZ.45.1350	5000/500	2300/1450 1900/1750	5,0/500		1350	550-2060	1200/2050 1350/2350	161x62			175	225/280 250/315	900 916
ZVP-S-TGZ.48.1200	5000/600	2350/1450 1950/1750	5,0/600		1350	550-2060	1200/2050 1350/2350	161x62					
ZVP-S-TGZ.48.1350	5000/600	2350/1450 1950/1750	5,0/600		1350	550-2060	1200/2050 1350/2350	161x62					

- 3 hydraulic functions required
- includes hoses and couplings
- bolt-on TGZ as standard
- protection strip with integrated hose guide as standard
- standard with easily replaceable wear zones and fork tip made of solid steel to reduce service costs
- thicker mangan steel wear zone (+6 mm) ISO III upon request
- pallet stop ISO III (see page 198) upon request:
 - A) 75 mm on the fork pocket sides
 - B) 400 mm
 - C) 850 mm
 type B and C reduce the useable length by 50 mm
- different pallet stop positions upon request
- solenoid valve upon request (12 V, 24 V, 48 V, 80 V - please specify)
- for ISO type B mounting upon request ISO III



DURWEN
Forklift Attachments

More than 75 years experience

PL 01-2024