


Fork positioner

ZVP-S-TGZ
ISO IV

telescopic forks, constant sideshift

The **ZVP-S-TGZ** is a combination of fork positioner and telescopic forks that enables quick and cost effective loading and stacking especially when loading and unloading from one side of a vehicle. The unit copes with a variety of logistical needs including different pallet sizes and load dimensions. The telescopic forks feature 100% synchronised reach movement for ease of use. As this fork positioner spreads the forks beyond the frame width, it is ideal for handling wide goods and pallets. Clamping not allowed. Fork pockets feature +2mm wear resistant mangan steel wear zone as standard.

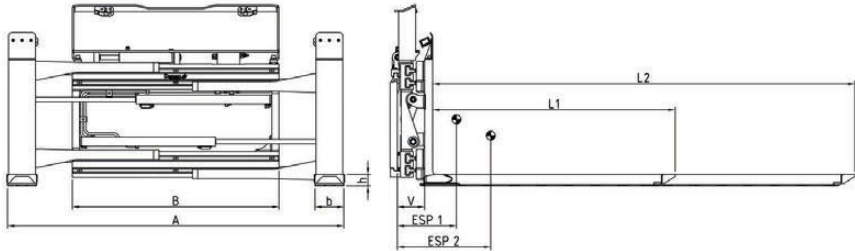

type	capacity kg/ LC 1 mm	capacity kg/ LC 2 mm	lift truck to/ LC mm	ISO	B mm	A mm	retracted extended L1/L2 mm	fork b x h mm	fork back mm	sideshift mm	V LLC mm	ESP/COG 1/2 mm	weight kg
ZVP-S-TGZ.50.1200 ZVP-S-TGZ.50.1350	5000/600	2350/1450 1950/1750	5,0/600	IV	1350	550-2060	1200/2050 1350/2350	161x62	150x50	+/- 100	179	220/275 245/310	985 1001
ZVP-S-TGZ.60.1200 ZVP-S-TGZ.60.1350	6000/600	3100/1450 2570/1750	6,0/600		1550	550-2260	1200/2050 1350/2350	215x69	200x50	+/- 160		230/295 290/365	1120 1155

- 3 hydraulic functions required
- includes hoses and couplings
- bolt-on TGZ as standard
- protection strip with integrated hose guide as standard
- standard with easily replaceable wear zones and fork tip made of solid steel to reduce service costs

- thicker mangan steel wear zone (+6 mm) ISO IV upon request
- pallet stop ISO IV (see page 198) upon request:
 - A) 75 mm on the fork pocket sides
 - B) 400 mm
 - C) 850 mm
- type B and C reduce the useable length by 50 mm
- different pallet stop positions upon request
- solenoid valve upon request (12 V, 24 V, 48 V, 80 V - please specify)
- for ISO type B mounting ISO IV upon request



DURWEN 
Forklift Attachments

More than 75 years experience

PL 01-2024