


Fork positioner

ZVP-TGZ
ISO II/III

telescopic forks, no sideshift

The **ZVP-TGZ** is a combination of fork positioner and telescopic forks that enables quick and cost effective loading and stacking especially when loading and unloading from one side of a vehicle. The unit copes with a variety of logistical needs including different pallet sizes and load dimensions. The telescopic forks feature 100% synchronised reach movement for ease of use. As this fork positioner spreads the forks beyond the frame width, it is ideal for handling wide goods and pallets. Clamping not allowed. Fork pockets feature +2mm wear resistant mangan steel wear zone as standard.

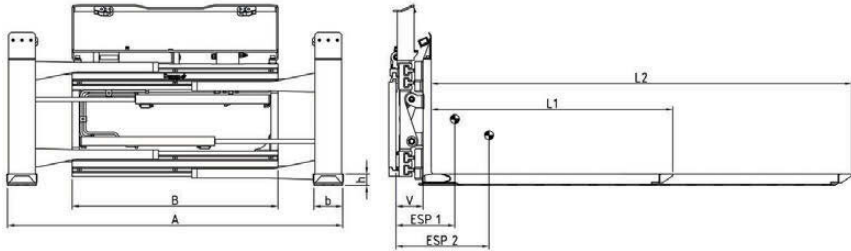

type	capacity kg/ LC 1 mm	capacity kg/ LC 2 mm	lift truck to/ LC mm	ISO	B mm	A mm	retracted extended L1/L2 mm	fork b x h mm	fork back mm	V LLC mm	ESP/COG 1/2 mm	weight kg
ZVP-TGZ.25.1200	2500/600	1200/1450	2,5/600	II	1050 1150	560-1780 560-1880	1200/2050	161x57	150x45	131 131	295/390 290/385	490 505
ZVP-TGZ.25.1350	2500/600	1000/1750	2,5/600	II	1050 1150	560-1780 560-1880	1350/2350	161x57	150x45	131 131	345/455 340/450	506 521
ZVP-TGZ.35.1200	3500/500	1630/1450	3,5/500	III	1050 1150	560-1780 560-1880	1200/2050	161x57	150x45	136 136	280/365 275/360	525 535
ZVP-TGZ.35.1350	3500/500	1390/1750	3,5/500	III	1050 1150	560-1780 560-1880	1350/2350	161x57	150x45	136 136	320/430 315/425	541 551
ZVP-TGZ.40.1200	4000/500	1850/1450	4,0/500	III	1150 1350	560-1860 560-2060	1200/2050	161x57	150x45	138 138	240/330 230/320	640 675
ZVP-TGZ.40.1350	4000/500	1550/1750	4,0/500	III	1150 1350	560-1860 560-2060	1350/2350	161x57	150x45	138 138	275/380 265/370	660 693
ZVP-TGZ.45.1200	5000/500	2300/1450	5,0/500	III	1350	550-2060	1200/2050	161x62	150x50	148	215/300	780
ZVP-TGZ.45.1350	5000/500	1900/1750	5,0/500	III	1350	550-2060	1350/2350	161x62	150x50	148	240/335	796
ZVP-TGZ.48.1200	5000/600	2350/1450	5,0/600	III	1350	550-2060	1200/2050	161x62	150x50	158	215/290	850
ZVP-TGZ.48.1350	5000/600	1950/1750	5,0/600	III	1350	550-2060	1350/2350	161x62	150x50	158	240/325	865

- 2 hydraulic functions required
(3 hydraulic functions integral sideshift)
- includes hoses and couplings
- bolt-on TGZ forks as standard
- protection strip with integrated hose guide as standard

- integral sideshift upon request
- standard with easily replaceable wear zones and fork tip made of solid steel to reduce service costs
- thicker mangan steel wear zone (+6 mm) ISO II/III upon request
- pallet stop ISO II/III (see page 198) upon request:
 - A) 75 mm on the fork pocket sides
 - B) 400 mm
 - C) 850 mm
- type B and C reduce the useable length by 50 mm
- different pallet stop positions upon request
- solenoid valve upon request (12 V, 24 V, 48 V, 80 V - please specify)
- for ISO type B mounting upon request ISO II/III



DURWEN
Forklift Attachments

More than 75 years experience