



Fork positioner

ZVW-GS
ISO IV

constant sideshift, bolt-on forks

The high-performance fork positioner ZVW-GS offers outstanding durability and excellent visibility.

The double chrome axis guideways is particularly clean and enables precise fork positioning due to high-quality hydraulics. The bolt-on forks are firmly attached to the carriers and provide smooth running and precision even in quick operation. The constant sideshift operates at every fork position. This means that a separate cylinder moves the complete frame.

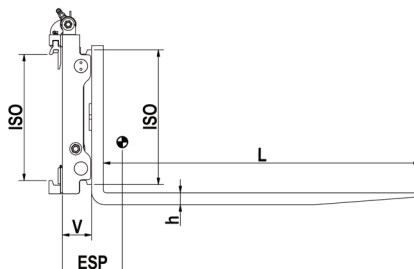


type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm OTO	forks b x h x L mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
ZVW 50-GS	5000/600	5,0/600	IV	1350 1450 1550	380-1260 380-1360 380-1460	150x70x1200	+/- 100	156	227 225 220	693 711 729
ZVW 60-GS	6000/600	6,0/600		1460 1660 1860	380-1340 380-1540 380-1740	150x70x1200	+/- 100 +/- 160 +/- 160	166	215 210 205	845 880 915
ZVW 70-GS	7000/600	6,5-7,0/600		1460 1860 2060	380-1340 380-1740 380-1940	150x70x1200	+/- 100 +/- 160 +/- 160	193	215 201 195	933 1061 1110
ZVW 80-GS	8000/600	8,0/600		1460 1800 1860 2060 2160 2260 2400	480-1340 480-1680 480-1740 480-1940 480-2040 480-2140 480-2280	200x70x1200	+/- 100 +/- 160 +/- 160 +/- 160 +/- 160 +/- 160 +/- 160	193	260 243 240 231 228 225 222	1090 1187 1204 1267 1291 1315 1350
ZVW 100-GS	8000/900	8,0/900		2060 2160 2260 2400	480-1940 480-2040 480-2140 480-2280	200x80x1200	+/- 160	210	240 238 235 230	1555 1585 1615 1670
ZVW 110-GS	8000/1100	8,0/1100		2060 2260 2400	480-1940 480-2140 480-2280	200x80x1200	+/- 160	233	242 236 232	1635 1700 1750

- 2 hydraulic functions required
- includes hoses and couplings

- constant sideshift as standard
- features bolt-on forks as standard

- also for hook-on forks ISO 2328
- load backrest/protection strip see page 240
- clamping of goods is not allowed

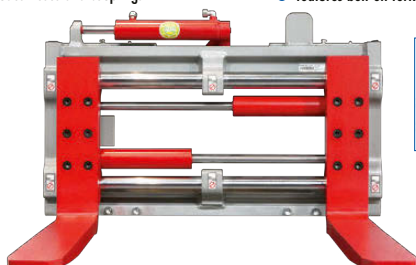

option: protection strip

DURWEN
Forklift Attachments

More than 75 years experience