


Fork positioner


integral sideshift, bolt-on forks

The high-performance fork positioner ZVW-G offers outstanding durability and excellent visibility. The double chrome axis guideways is particularly clean and enables precise fork positioning due to high-quality hydraulics. The bolt-on forks are firmly attached to the carriers and provide smooth running and precision even in quick operation. The integral sideshift operates depending on fork position. This means that only the fork carriers move inside the static frame.

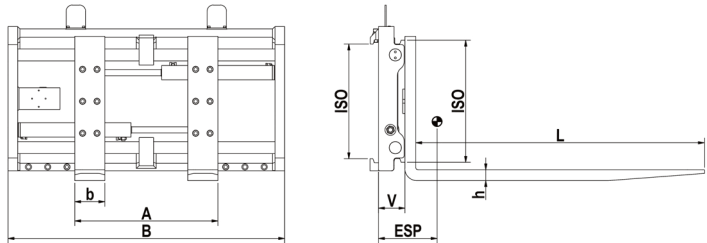

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm OTO	forks b x h x L mm	V LLC mm	ESP COG mm	weight kg										
ZVW 50-G	5000/600	5,0/600	IV	1350 1450 1550	380-1260 380-1360 380-1460	150x70x1200	133	227 222 217	641 658 675										
ZVW 60-G	6000/600	6,0/600		1460 1660 1860	380-1340 380-1540 380-1740	150x70x1200	143	222 214 205	747 785 822										
ZVW 70-G	7000/600	6,5-7,0/600		1460 1860 2060	380-1340 380-1740 380-1940	150x70x1200	170	220 201 190	857 948 1000										
ZVW 80-G	8000/600	8,0/600		1460 1800 1860 2060 2160 2260 2400	480-1340 480-1680 480-1740 480-1940 480-2040 480-2140 480-2280	200x70x1200	170	260 244 240 232 228 224 220	995 1075 1090 1142 1170 1198 1230										
				ZVW 100-G	8000/900			8,0/900	2060 2160 2260 2400	480-1940 480-2040 480-2140 480-2280	200x80x1200	195	230 227 225 220	1465 1500 1535 1590					
									ZVW 110-G	8000/1100			8,0/1100	2060 2260 2400	480-1940 480-2140 480-2280	200x80x1200	210	235 225 220	1540 1615 1670

- 2 hydraulic functions required
- includes hoses and couplings
- includes sideshift via valve, depending on opening range
- features bolt-on forks as standard
- also for hook-on forks ISO 2328
- load backrest/protection strip see page 240
- clamping of goods is not allowed
- if you don't want sideshift notify us on your order

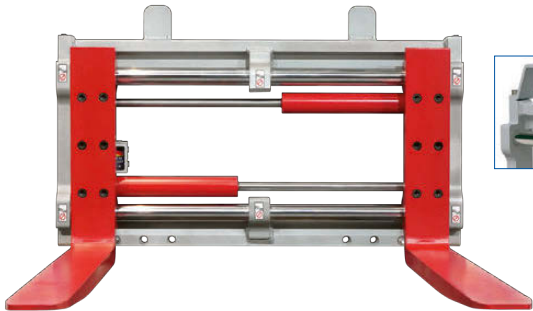

option: protection strip