
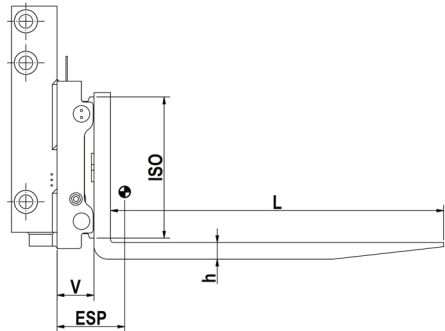


Fork positioner

**ZVW-IG
ISO III**

integrated version, integral sideshift, bolt-on forks


The integral fork positioner ZVW-IG uses a robust chromed bar system in a stable frame. The unit is equipped with bolt-on forks. Depending on the capacity, hook-on forks can be used for replacement. Integral sideshift (via valve) is standard and depends on the opening range.

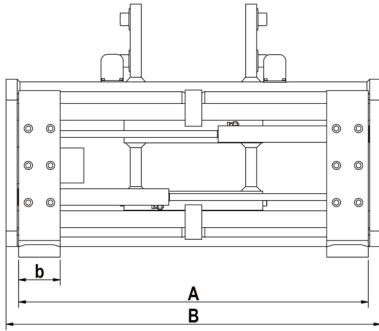

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm OTO	forks b x h x L mm	V LLC mm	ESP COG mm	weight kg
ZVW 30-IG*	3000/500	3,0/500	III	1040 1150 1350	325-945 325-1055 325-1255	125x45x1200	117	245 240 235	335 340 350
ZVW 35-IG	3500/500	3,0/600-3,5/500		1150 1350	340-1070 340-1270	140x50x1200	117	265 255	380 400
ZVW 40-IG	4000/500	3,5/600-4,0/500		1150 1350 1550 1750	370-1050 370-1250 370-1450 370-1650	140x50x1200	133	245 240 225 215	445 480 515 545
				1150 1350 1550 1750	380-1060 380-1260 380-1460 380-1660			270 260 245 235	500 530 560 590
				1150 1350 1550 1750	380-1060 380-1260 380-1460 380-1660			270 260 245 235	505 535 565 595
				1150 1350 1550 1750	380-1060 380-1260 380-1460 380-1660			270 260 245 235	505 535 565 595

- 2 hydraulic functions required
- ready to connect, access metric
- features bolt-on forks as standard
- for hook-on forks ISO 2328
- including brackets, chain anchor and stub shafts, without rollers

- detailed information including carriage drawings are required with the order as well as fork lift model and mast model details
- weight, COG and LLC do not include brackets
- LLC does not include forks
- load backrest/protection strip see page 240
- clamping of goods is not allowed

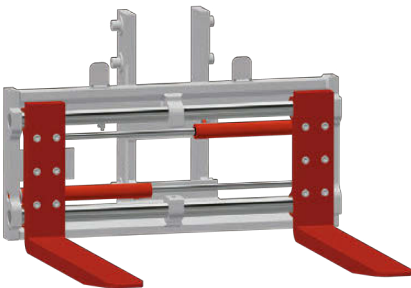

*Forks longer 1600 mm
cross section changes

type	forks b x h mm
ZVW 30-IG	125x50

DURWEN
Forklift Attachments

More than 75 years experience