


Fork positioner

**ZVW
ISO III**

integral sideshift, no forks

The high-performance fork positioner ZVW offers outstanding durability and excellent visibility. The double chrome axis guideways is particularly clean and enables precise fork positioning due to high-quality hydraulics. Standard forks with ISO mounting or bolt-on forks may be used. The integral sideshift operates depending on fork position. This means that only the fork carriers move inside the static frame.

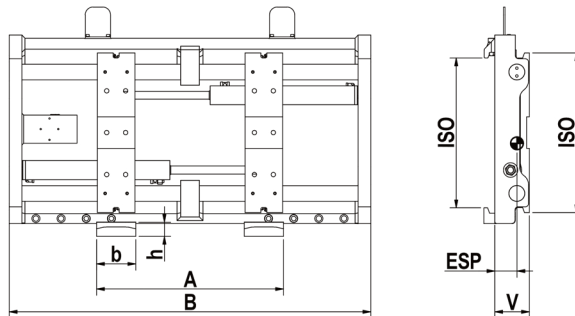


type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm OTO	b mm	V LLC mm	ESP COG mm	weight kg	
ZVW 30	3000/500	3,0/500	III	1040	320-940	120	110	48	184	
				1150	320-1050			46	193	
				1200	320-1100			46	198	
				1300	320-1200			45	209	
				1350	320-1250			45	214	
ZVW 35	3500/500	3,0/600-3,5/500		1150	320-1050	120	110	46	193	
				1200	320-1100			46	198	
				1300	320-1200			45	209	
				1350	320-1250			45	214	
ZVW 45	5000/600	3,5/600-5,0/600		1150	370-1050	140	133	57	262	
				1250	370-1150			57	277	
				1350	370-1250			56	292	
				1450	370-1350			56	310	
				1550	370-1450			55	328	
				1750*	370-1650			54	358	
				2000**	370-1900			54	395	

- 2 hydraulic functions required
- includes hoses and couplings
- includes sideshift via valve, depending on opening range
- hook-on or bolt-on forks can be used
- forks not included

- please indicate fork width when ordering
- load backrest/protection strip see page 240
- if you don't want sideshift notify us on your order

- clamping of goods is not allowed
- * minimum truck carriage width: 1450 mm
- ** minimum truck carriage width: 1750 mm

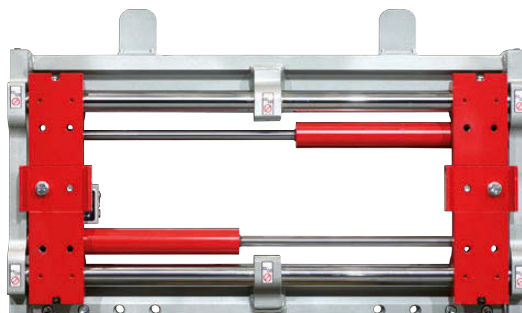

option: protection strip



fork lock

DURWEN 
Forklift Attachments

More than 75 years experience