


Fork positioner

integral sideshift, no forks

The high-performance fork positioner ZVW offers outstanding durability and excellent visibility. The double chrome axis guideways is particularly clean and enables precise fork positioning due to high-quality hydraulics. Standard forks with ISO mounting or bolt-on forks may be used. The integral sideshift operates depending on fork position. This means that only the fork carriers move inside the static frame.

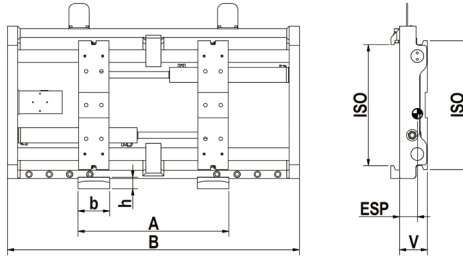


type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm OTO	b mm	V LLC mm	ESP COG mm	weight kg
ZVW 50	5000/600	5,0/600	IV	1350 1450 1550	370-1250 370-1350 370-1450	140	133	52 51 50	376 393 410
ZVW 60	6000/600	6,0/600		1460 1660 1860	380-1340 380-1540 380-1740	150	143	58 57 56	462 489 516
ZVW 70	7000/600	6,5-7,0/600		1460 1860 2060	380-1340 380-1740 380-1940	150	170	69 68 67	571 662 720
ZVW 80	8000/600	8,0/600		1460 1800 1860 2060 2160 2260 2400	480-1340 480-1680 480-1740 480-1940 480-2040 480-2140 480-2280	200	170	71 71 70 69 69 69 68	585 673 688 740 768 795 830
				2060 2160 2260 2400	480-1940 480-2040 480-2140 480-2280			78 78 77 77	996 1030 1066 1120
				2060 2260 2400	480-1940 480-2140 480-2280			86 85 84	1071 1150 1200
ZVW 100	8000/900	8,0/900		2060 2160 2260 2400	480-1940 480-2040 480-2140 480-2280	200	195	78 78 77 77	996 1030 1066 1120
ZVW 110	8000/1100	8,0/1100		2060 2260 2400	480-1940 480-2140 480-2280	200	210	86 85 84	1071 1150 1200


- 2 hydraulic functions required
- includes hoses and couplings
- includes sideshift via valve, depending on opening range
- hook-on or bolt-on forks can be used

- forks not included
- please indicate fork width when ordering
- load backrest/protection strip see page 240

- if you don't want sideshift notify us on your order
- clamping of goods is not allowed

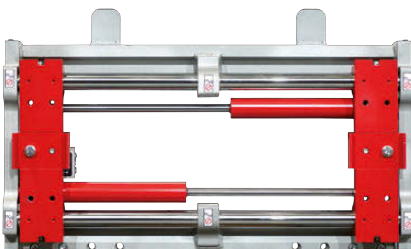

option: protection strip



fork lock