
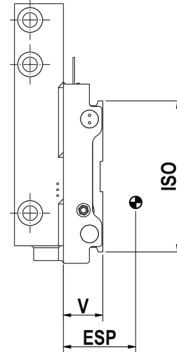


Fork positioner

**ZVW-I
ISO III**


integrated version, integral sideshift

The integral fork positioner ZVW-I offers outstanding durability and excellent visibility. The double chrome axis guideways is particularly clean and enables precise fork positioning due to high-quality hydraulics. Standard forks with ISO mounting or bolt-on forks may be used. The integral sideshift operates depending on fork position. This means that only the fork carriers move inside the static frame.

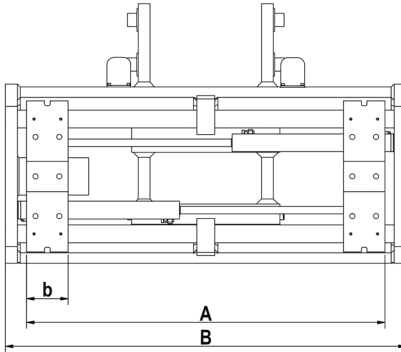

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm OTO	b mm	V LLC mm	ESP COG mm	weight kg
ZVW 30-I	3000/500	3,0/500	III	1040 1150 1350	320-940 320-1050 320-1250	120	117	50	190 195 205
ZVW 35-I	3500/500	3,0/600-3,5/500		1150 1350	320-1050 320-1250	120	117	49	200 220
ZVW 45-I	5000/500	3,5/600-5,0/500		1150 1350 1550 1750	370-1050 370-1250 370-1450 370-1650	140	133	53	270 300 330 360
ZVW 48-I	5000/600	5,0/600		1150 1350 1550 1750	370-1050 370-1250 370-1450 370-1650	140	133	53	275 305 335 365

- 2 hydraulic functions required
- ready to connect, access metric
- includes sideshift via valve, depending on opening range
- for hook-on forks ISO 2328
- bolt-on forks can be used
- forks not included
- please indicate fork width when ordering
- including brackets, chain anchor and stub shafts, without rollers
- detailed information including carriage drawings are required with the order as well as fork lift model and mast model details
- weight, COG and LLC do not include brackets
- LLC does not include forks
- load backrest/protection strip see page 2400
- clamping of goods is not allowed

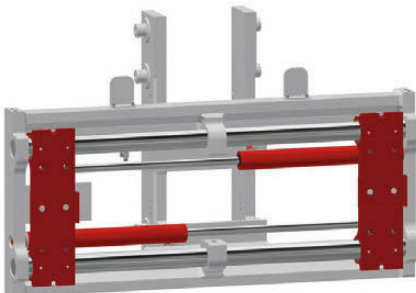

DURWEN 
Forklift Attachments

More than 75 years experience

PL 01-2024