


Fork positioner

integrated version, integral sideshift

The integral fork positioner ZVW-I offers outstanding durability and excellent visibility. The double chrome axis guideways is particularly clean and enables precise fork positioning due to high-quality hydraulics. Standard forks with ISO mounting or bolt-on forks may be used. The integral sideshift operates depending on fork position. This means that only the fork carriers move inside the static frame.

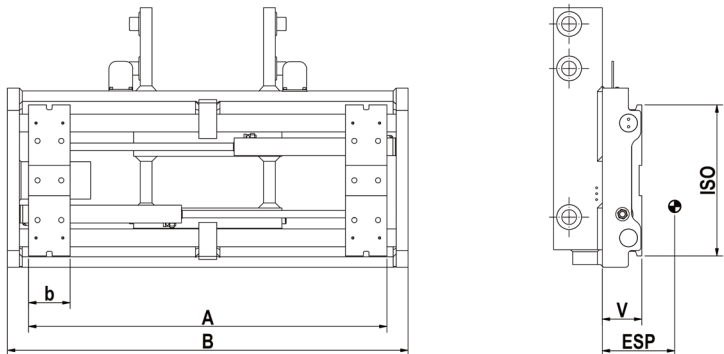

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm OTO	b mm	V LLC mm	ESP COG mm	weight kg
ZVW 25-I	2500/500	1,5 - 2,5/500	II	980	320-880	120	114	50	155
				1040	320-940				160
				1150	320-1050				170
				1350	320-1250				190
ZVW 28-I	2500/600	2,5/600		1040	320-940				160
				1150	320-1050				170
				1350	320-1250				190

- 2 hydraulic functions required
- ready to connect, access metric
- includes sideshift via valve, depending on opening range
- for hook-on forks ISO 2328
- bolt-on forks can be used
- forks not included
- please indicate fork width when ordering
- including brackets, chain anchor and stub shafts, without rollers
- detailed information including carriage drawings are required with the order as well as fork lift model and mast model details
- weight, COG and LLC do not include brackets
- LLC does not include forks
- load backrest/protection strip see page 240
- clamping of goods is not allowed

