


Fork positioner

ZVW-S
ISO II


constant sideshift, no forks

The high-performance fork positioner ZVW-S offers outstanding durability and excellent visibility. The double chrome axis guideways is particularly clean and enables precise fork positioning due to high-quality hydraulics. Standard forks with ISO mounting or bolt-on forks may be used. The constant sideshift operates at every fork position. This means that a separate cylinder moves the complete frame.

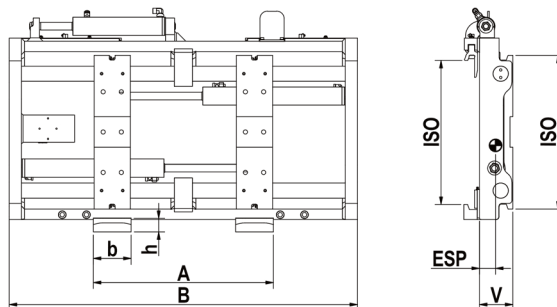


type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm OTO	b mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
ZVW 20-S	2000/500	1,0-2,0/500	II	980 1040 1150	320-880 320-940 320-1050	120	+/- 100	124	53 53 52	181 191 203
ZVW 25-S	2500/500	2,0-2,5/500		980 1040 1150 1200 1350	320-880 320-940 320-1050 320-1100 320-1250				53 52 52 52 51	185 192 204 210 225
ZVW 28-S	2500/600	2,5/600		1040 1150 1200 1350	320-940 320-1050 320-1100 320-1250				52 52 52 51	192 204 210 225

- 2 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard
- hook-on or bolt-on forks can be used
- forks not included
- please indicate fork width when ordering
- load backrest/protection strip see page 240
- clamping of goods is not allowed

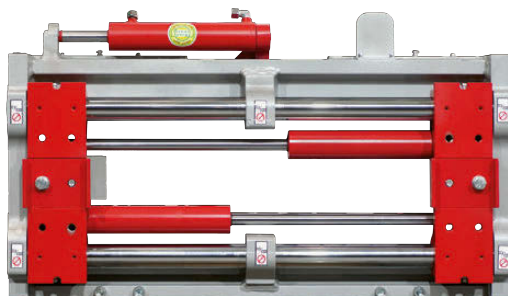

option: protection strip



fork lock

DURWEN 
Forklift Attachments

More than 75 years experience

PL 01-2024