


Fork positioner

ZVW-S
ISO IV

constant sideshift, no forks

The high-performance fork positioner ZVW-S offers outstanding durability and excellent visibility. The double chrome axis guideways is particularly clean and enables precise fork positioning due to high-quality hydraulics. Standard forks with ISO mounting or bolt-on forks may be used. The constant sideshift operates at every fork position. This means that a separate cylinder moves the complete frame.

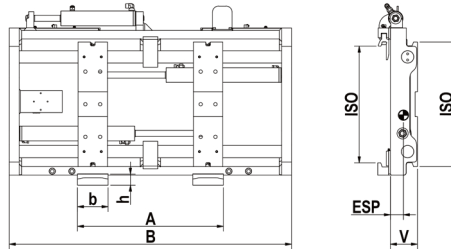


type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm OTO	b mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
ZVW 50-S	5000/600	5,0/600	IV	1350 1450 1550	370-1250 370-1350 370-1450	140	+/- 100	156	61	437 455 473
ZVW 60-S	6000/600	6,0/600		1460 1660 1860	380-1340 380-1540 380-1740	150	+/- 100 +/- 160 +/- 160	166	65	560 595 630
ZVW 70-S	7000/600	6,5-7,0/600		1460 1860 2060	380-1340 380-1740 380-1940	150	+/- 100 +/- 160 +/- 160	193	79	682 776 822
ZVW 80-S	8000/600	8,0/600		1460 1800 1860	480-1340 480-1680 480-1740	200	+/- 100 +/- 160 +/- 160	193	83 82 82	685 785 802
				2060 2160 2260	480-1940 480-2040 480-2140		+/- 160 +/- 160 +/- 160		81 81 81	866 890 915
				2400	480-2280		+/- 160		81	950
				2060 2160 2260 2400	480-1940 480-2040 480-2140 480-2280		+/- 160		95 95 95 93	1090 1120 1150 1198
				2060 2260 2400	480-1940 480-2140 480-2280		+/- 160		100 101 101	1165 1230 1280
ZVW 100-S	8000/900	8,0/900		2060 2160 2260 2400	480-1940 480-2040 480-2140 480-2280	200	+/- 160	210	95 95 95 93	1090 1120 1150 1198
ZVW 110-S	8000/1100	8,0/1100		2060 2260 2400	480-1940 480-2140 480-2280	200	+/- 160	233	100 101 101	1165 1230 1280

- 2 hydraulic functions required
- includes hoses and couplings

- constant sideshift as standard
- hook-on or bolt-on forks can be used
- forks not included

- please indicate fork width when ordering
- load backrest/protection strip see page 2400
- clamping of goods is not allowed

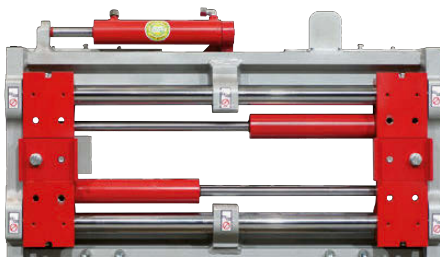

option: protection strip



fork lock

DURWEN
Forklift Attachments

More than 75 years experience