


Fork positioner

ZVW-S-TGZ
ISO III

with hook-on telescopic forks, with constant sideshift

The **fork positioner type ZVW-S-TGZ** with shaft guidance features durability and excellent visibility. The shaft guidance is especially clean and allows for precise fork positioning due to high-quality hydraulics. Constant sideshift enables usage of the complete sideshift at every fork position. The unit is equipped with telescopic forks which facilitate loading and unloading of transport vehicles. The TGZ can be extended under load and feature 100% synchronised reach movement. Fork pockets feature +2mm wear resistant mangan steel wear zone as standard.

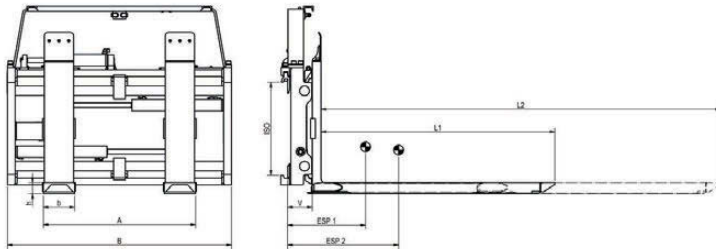

type	capacity kg/ LC 1 mm	capacity kg/ LC 2 mm	lift truck to/ LC mm	ISO	B mm	A mm	retracted extended L1/L2 mm	fork b x h mm	sideshift mm	V LLC mm	ESP/COG 1/2 mm	weight kg
ZVW-S-TGZ.35.1200	3500/500	1630/1450	3,0- 3,5/500	III	1040 1150	360-980 360-1090	1200/2050	161 x 57	+/- 100	127	290/390 280/380	450 460
ZVW-S-TGZ.35.1350	3500/500	1390/1750	3,0- 3,5/500		1040 1150	360-980 360-1090	1350/2350	161 x 57		127	330/460 320/445	468 478
ZVW-S-TGZ.40.1200	4000/500	1850/1450	3,5/600- 4,0/500		1150 1350	390-1070 390-1270	1200/2050	161 x 57		150	270/350 250/330	532 576
ZVW-S-TGZ.40.1350	4000/500	1550/1750	3,5/600- 4,0/500		1150 1350	390-1070 390-1270	1350/2350	161 x 57		150	305/410 285/385	550 594
ZVW-S-TGZ.45.1200	5000/600	2300/1450	4,0- 5,0/600		1350	390-1270	1200/2050	161 x 62		150	265/345 300/400	598 620
ZVW-S-TGZ.45.1350		1900/1750				390-1270	1350/2350					

- 3 hydraulic functions required
- includes hoses and couplings
- hook-on forks ISO 2328 as standard
- protection strip with integrated hose guide as standard
- standard with easily replaceable wear zones and fork tip made of solid steel to reduce service costs

- thicker mangan steel wear zone (+6 mm) ISO III upon request

- bolt-on forks ISO III upon request

- pallet stop ISO III (see page 198) upon request:

A) 75 mm on the fork pocket sides

B) 400 mm


C) 850 mm

Type B and C reduce the useable length by at least 50 mm. Please indicate required position upon order.

- solenoid valve upon request (12 V, 24 V, 48 V, 80 V - please specify)

- standard is ISO A

- for ISO type B mounting upon request ISO III

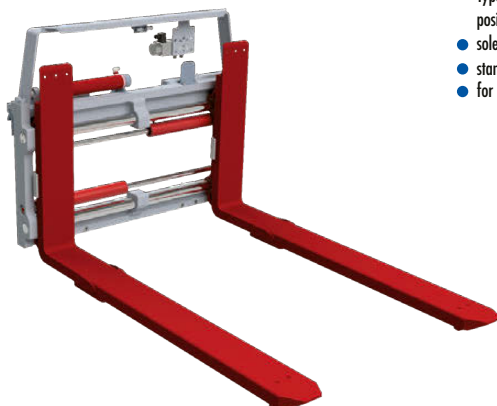

DURWEN
Forklift Attachments

More than 75 years experience

PL 01-2024