


Double pallet handler beverage-PremiumCam

DPK-SFD

The **double pallet handler beverage-PremiumCam** is based on a standard DPK unit. The patented extra equipment of three cameras integrated into the forks (SideCam) enables a safe and fast entering of the load. The cameras are positioned in a way that they are protected and at the same time allow for handling pallets at maximum closed fork position. Built-in sensors enable automatic switching to a camera integrated in the fork tip (FrontCam), which can display a safe loading process at the front.

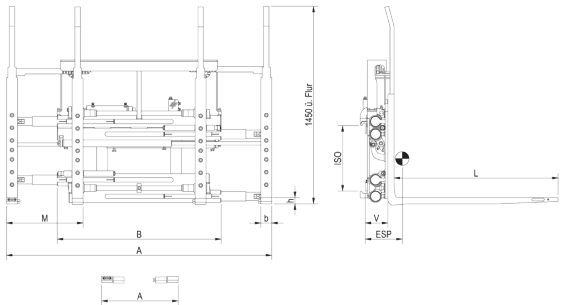

Beverage-PremiumCam without FrontCam											
type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	M mm	forks b x h x L mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
DPK 25-D-SFD-GPC	2500/600	2,5/600	II	1200	560-1940	560	80x45x1200	+/- 100	165	255	570
DPK 30-D-SFD-GPC	2600/600	3,0/500	III	1200	560-1940		80x45x1200		165	255	575
DPK 35-D-SFD-GPC	3200/600	3,0/600-4,0/500	III	1200	560-1940		80x60x1200		182	250	720
DPK 40-D-SFD-GPC	4500/600	4,0-5,0/600	III	1400	560-1940		80x60x1200		192	245	805

Beverage-PremiumCam with FrontCam											
type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	M mm	forks b x h x L mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
DPK 25-D-SFD-GPCF	2500/600	2,5/600	II	1200	560-1940	560	80x45x1200	+/- 100	165	255	570
DPK 30-D-SFD-GPCF	2600/600	3,0/500	III	1200	560-1940		80x45x1200		165	255	575
DPK 35-D-SFD-GPCF	3200/600	3,0/600-4,0/500	III	1200	560-1940		80x60x1200		182	250	720
DPK 40-D-SFD-GPCF	4500/600	4,0-5,0/600	III	1400	560-1940		80x60x1200		192	245	805

- 2 hydraulic functions required
- includes hoses and couplings
- includes mast cable kit and monitor
- constant sideshift as standard
- automatic lubrication system upon request

