


Clamp with turnable forks

constant sideshift, bolt-on forks


DGK-S

The clamp with turnable forks DGK allows for flexible use of forklift trucks. The fork on this attachment can be converted manually from pallet to clamp position. Loads standing close together can be clamped easily. Pallets can also be handled simply with forks in the normal position. The attachment is not recommended for heavy duty clamp jobs and clamping with forks in the pallet position is not allowed.

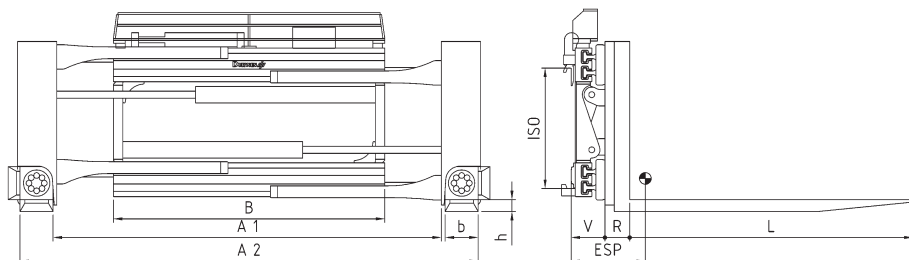

type	capacity on forks kg LC mm	capacity as clamp kg LC mm	lift truck to LC mm	ISO	B mm	opening range A1 ITL mm	opening range A2 ITL mm	forks b x h x L mm	sideshift mm	R mm	V LLC mm	ESP COG mm	weight kg
DGK 20-S	2000/500	1200/500	1,5- 2,0/500	II	1050 1150	155-1235 340-1700	405-1485 590-1950	100x45x1200	+/- 100	100	118	215 210	408 415
DGK 25-S	2500/600	1750/500	2,0- 2,5/600	II	1050 1150	130-1210 315-1675	395-1485 590-1940	125x45x1200		105	153	235 225	515 530
DGK 30-S	3000/500	2000/500	3,0/500	III	1050 1150 1350	115-1195 300-1660 300-1860	395-1475 580-1940 580-2140	140x50x1200		105	153	252 247 236	545 560 575

- 2 hydraulic functions required
- includes hoses and couplings
- with pressure relief valve on the clamp function as standard
- constant sideshift as standard
- sideshift rollers as standard
- standard with protection strip
- Load backrest type LS-K upon request
- forks can be set to 0°/45°/90°, clamping only in 90° position
- max. fork length 1600 mm
- mounting ISO A as standard, ISO B upon request
- pressure gauge with hand wheel upon request
- manual 3 stage pressure relief valve
- hydraulic fork turn upon request
- rotation lever upon request (eases manual turn especially with longer forks)

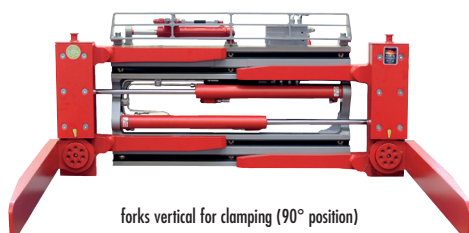

forks vertical for clamping (90° position)

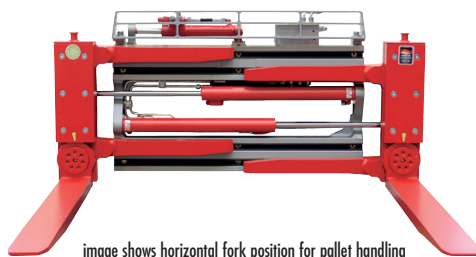


image shows horizontal fork position for pallet handling

DURWEN
Forklift Attachments

More than 75 years experience