


Revolving Fork clamp 360°

DUZ
ISO II/III

bolt-on forks

The revolving fork clamp **DUZ** is a multi-purpose clamp with 360° continuous rotation. Loads can be carried on forks or clamped between them. Revolving fork clamps are perfect for emptying containers, boxes, bins etc.. The unit features bolt-on forks and a direct drive for rotation.

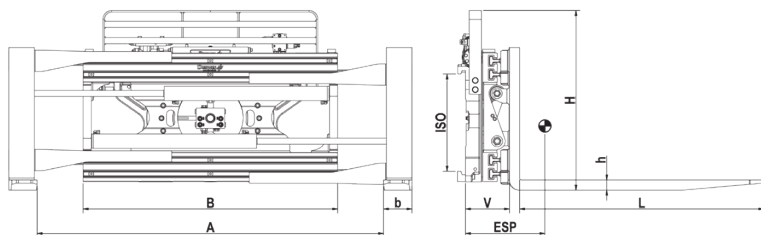


type	capacity on forks kg LC mm	capacity as clamp kg LC mm	lift truck to LC mm	ISO	B mm	opening range A ITI mm	forks b x h x L mm	V LLC mm	ESP COG mm	weight kg
DUZ 15	1900/500	1400/500	1,5-2,0/500	II	980 1050	360-1510 360-1580	100x40x1200	182	190 188	485 495
DUZ 25	2500/600	1900/500	2,0-2,5/600	II	980 1050 1150 1250 1350	310-1460 310-1530 310-1630 310-1730 310-1830	125x50x1200	212	198 195 190 188 187	655 665 680 695 710
DUZ 30	3000/500	2400/500	3,0/500	III	980 1050 1150 1250 1350	310-1460 310-1530 310-1630 310-1730 310-1830	125x50x1200	212	198 195 190 188 187	655 665 680 695 710
DUZ 35	3500/500	2700/500	3,0/600- 3,5/500	III	1150 1350	260-1580 260-1780	150x50x1200	222	210 200	735 770
DUZ 40	4100/500	2900/500	3,5/600- 4,0/500	III	1250 1350 1450	250-1660 250-1760 250-1860	150x50x1200	240	218 215 205	955 975 995
DUZ 45	4500/600	3500/600	4,0/600- 5,0/500	III	1250 1350 1450	250-1660 250-1760 250-1860	150x60x1200	250	220 217 205	965 985 1005
DUZ 48	4800/600	3500/600	5,0/600	III	1350	250-1700	150x70x1200	260	230	1130

- 2 hydraulic functions required
- includes hoses and couplings
- 360° endless rotation
- direct drive due to worm gear
- features bolt-on forks as standard
- toe-in on forks as standard

- with pressure relief valve on the clamp function
- standard with protection strip type SB-DG (does not rotate, height = H)
- cylinder protection upon request
- solenoid valve upon request
(12 V, 24 V, 48 V, 80 V - please specify)

- pressure gauge + pressure manually adjustable (up to 160 bar) upon request
- slip-on arms upon request
- foundry/fishing version upon request

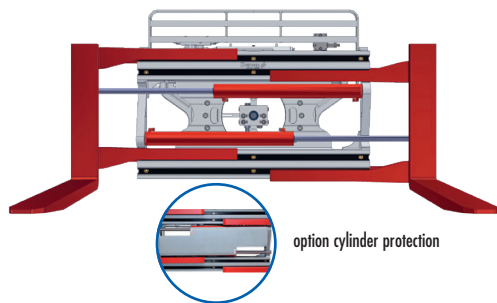

option cylinder protection



bolt-on forks

DURWEN
Forklift Attachments

More than 75 years experience