


Bale clamp

integral sideshift

The bale clamp PBK is made with double T steel profiles. This type of profile supports excellent visibility through the clamp and allows for a reduced lost load centre. The smooth and flush arms allow for dense stacking of bales. An integral sideshift is fitted as standard.

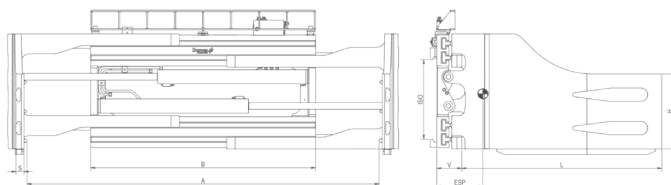


type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	opening range A ITI mm	height H mm	length L mm	S (max)* mm	V LLC mm	ESP COG mm	weight kg
PBK 20	1650/500	1,5-2,0/500	II	980	530-1710	350	800	30 (77)	106	208	387
				980	520-1700		1000			243	417
				1050	570-1770		800			205	397
				1050	560-1760		1000			240	427
PBK 25	2300/500	2,0-2,5/600	II	980	520-1700	350	1000	30 (92)	138	233	488
				980	510-1690		1200			283	523
				1050	560-1760		1000			229	500
				1050	550-1750		1200			283	535
				1150	560-1860		1000			222	520
				1150	550-1850		1200			277	555
				1150	590-1940		1200			277	555
PBK 30	2700/500	3,0/500	III	980	530-1710	400	1000	30 (93)	138	238	575
				980	520-1700		1200	35 (98)		308	640
				1050	570-1770		1000	30 (93)		234	585
				1050	560-1760		1200	35 (98)		304	650
				1150	570-1870		1000	30 (93)		227	605
				1150	560-1860		1200	35 (98)		297	670
				1350	610-2260		1000	30 (93)		210	655
				1350	600-2250		1200	35 (98)		280	720
PBK 35	3000/500	3,0/600- 3,5/500	III	1150	570-1870	450	1000	40 (110)	141	230	805
				1150	560-1860		1200			300	850
				1350	610-2260		1000			225	860
				1350	600-2250		1200			295	895
PBK 40	3200/600	3,5/600- 4,0/500	III	1150	560-1860	450	1200	40 (110)	141	290	910
				1150	550-1850		1400		151	360	990
				1350	600-2250		1200		141	285	930
				1350	590-2240		1400		151	355	1010
PBK 45	3600/600	4,0/600- 5,0/500	III	1350	520-2120	450	1200	40 (128)	151	290	950
				1350	500-2100		1600			409	1085
				1550	600-2450		1200			285	980
				1550	580-2430		1600			404	1115
				1750	500-2500		1600			400	1180
PBK 48	4200/600	5,0/600	III	1350	540-2120	450	1200	40 (128)	161	280	980
				1350	520-2100		1600			400	1110
				1550	620-2470		1200			275	1010
				1550	600-2450		1600			395	1140

- 2 hydraulic functions required
- includes hoses and couplings

- wear strips welded under arms as standard
- load backrest type LS-K upon request
- cylinder protection upon request

- wear strips under frame upon request
- constant sideshift upon request
- longer arms upon request

* including rebar and pre-tension



option:
cylinder protection

DURWEN
Forklift Attachments

More than 75 years experience