


Fork clamp

constant sideshift, bolt-on forks

PGK-S
ISO II/III

The fork clamp PGK-S can spread the forks beyond the attachment frame width. It can carry loads on the forks as well as clamped between the forks. The strong steel profiles allow for excellent visibility and minimised lost load centre. A constant sideshift is included as well as bolt-on forks.

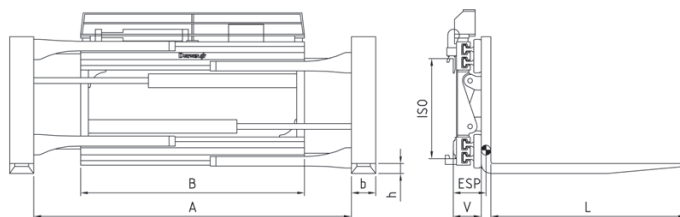

type	capacity on forks kg LC mm	capacity as clamp kg LC mm	lift truck to LC mm	ISO	B mm	opening range A ITL mm	forks b x h x L mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
PGK 15-S*	1500/500	1200/500	1,0-1,5/500	II	980 1050	360-1510 360-1580	100x35x1200	+/- 100	116	190 188	305 310
PGK 20-S	2000/500	1500/500	1,6-2,0/500	II	980 1050 1150	360-1510 360-1580 360-1680	100x40x1200		121	202 200 195	325 355 345
PGK 25-S	2500/600	1900/500	2,0-2,5/600	II	980 1050 1150 1150 1200 1400	310-1460 310-1530 310-1630 70-1150 310-1680 310-1880	125x45x1200		148	222 218 215 212 210 205	425 435 450 445 455 485
PGK 30-S	3000/500	2400/500	3,0/500	III	980 1050 1150 1150 1200 1300 1350 1450	310-1460 310-1530 310-1630 210-1430 310-1680 310-1780 310-1830 310-1930	125x50x1200		148	220 215 210 212 210 205 205 200	445 455 470 465 480 490 500 515
PGK 35-S	3500/500	2700/500	3,0/600- 3,5/500	III	1150 1250 1350	260-1580 260-1680 260-1780	150x50x1200		153	240 237 235	530 550 570
PGK 40-S	4100/500	2900/500	3,5/600- 4,0/500	III	1150 1250 1350 1450	250-1560 250-1660 250-1760 250-1860	150x50x1200		155	215 212 210 202	665 680 700 720
PGK 45-S	4500/600	3500/500	4,0/600- 5,0/500	III	1250 1350 1450 1550	250-1660 250-1760 250-1860 250-1960	150x60x1200		165	210 205 204 203	720 740 760 780
PGK 48-S	5000/600	3500/600	5,0/600	III	1350 1450 1550	250-1700 250-1800 250-1900	150x70x1200		175	230 225 220	830 845 860

*Forks longer 1600 mm
cross section changes

type	forks b x h mm
PGK 15-S	100x40

- 2 hydraulic functions required
- includes hoses and couplings
- features bolt-on forks as standard
- toe-in on forks as standard
- constant sideshift as standard
- sideshift rollers as standard
- with pressure relief valve on the clamp function as standard
- with protection strip as standard

- load backrest type LS-K upon request
- cylinder protection upon request
- slip-on arms upon request
- foundry/fishing version upon request

DURWEN
Forklift Attachments

More than 75 years experience