


Pallet exchanger

PWK

360° total rotation

The **pallet exchanger PWK** is used for clamping loads and rotating them through 180°, allowing the load to be placed on an alternative pallet. Total rotation is 360°. The rotator uses a worm gear system protected against the ingress of dirt and will give a long service life.

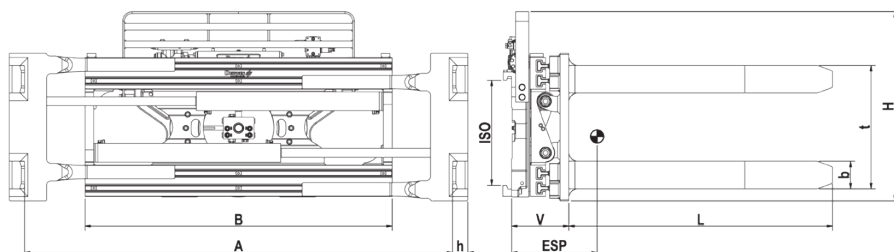


type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	opening range A ITI mm	t mm	forks b x h x L mm	V LLC mm	ESP COG mm	weight kg
PWK 15	1500/500	1,0-2,0/500	II	980	450-1680	560	100x50x1200	238	295	635
PWK 25	2000/500	2,0-2,5/600	II	980 1150	540-1650 560-1900		125x50x1200	262	297 288	800 825
PWK 30	2500/500	3,0/500	III	1150 1350	560-1900 560-2100		125x50x1200	262	284 279	830 850
PWK 35	3000/500	3,0/600- 3,5/500	III	1350 1450	560-2100 560-2200		150x50x1200	262	301 299	930 945
PWK 45	3500/500	3,5/600- 5,0/500	III	1350 1550	560-2100 560-2300		150x60x1200	294	299 297	1230 1280

- 2 hydraulic functions required (3 hydraulic functions with constant sideshift)
- includes hoses and couplings
- welded forks as standard

- standard with protection strip type SB-DG (does not rotate, height = H)
- constant sideshift upon request
- solenoid valve upon request (12 V, 24 V, 48 V, 80 V - please specify)

- pressure gauge with hand wheel upon request
- side arm upon request

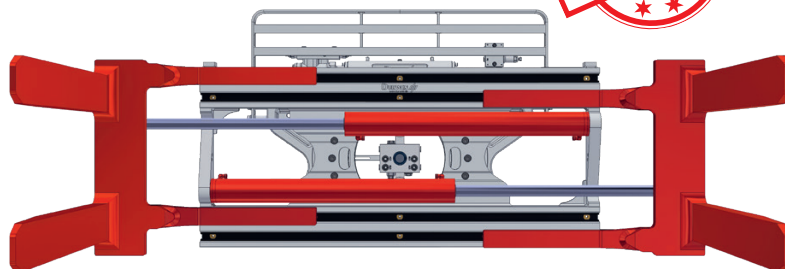

DURWEN 
Forklift Attachments

More than 75 years experience