


Foam clamp

USK

integral sideshift

The foam clamp USK is ideal for foam block handling. The tubular arm construction allows for safe and careful handling. The arms are bolted to the double T profile carriers.

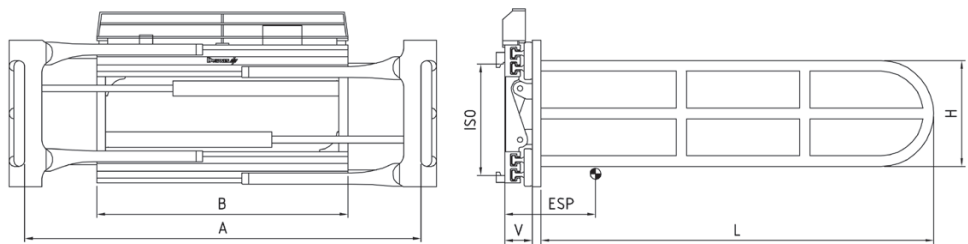

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A ITI mm	height H mm	length L mm	V LLC mm	ESP COG mm	weight kg
USK 20	800/1000	1,0-2,0/500	II	1050	600-1900	450	1600	106	330	430
				1050	600-1900		1800		380	440
				1150	750-2250		1600		320	445
				1150	750-2250		1800		370	465
				1350	850-2480		1600		310	480
				1350	850-2480		1800		360	500
				1550	600-2400		1600		300	515
				1550	600-2400		1800		350	530
				1650	600-2500		1600		290	535
				1650	600-2500		1800		340	550

- 2 hydraulic functions required
- includes hoses and couplings
- with protection strip as standard
- load backrest type LS-K upon request
- bolt-on arms as standard
- different arm length upon request
- constant sideshift upon request

