
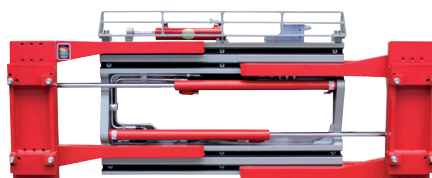


Sideshifting fork positioner

ZVP-AS

constant sideshift, ISO adaptors

The **sideshifting fork positioner ZVP-AS** allows the use of standard forklift truck forks and is designed to allow fork spread beyond the width of the carriage. This flexible feature is ideal in situations where space is important. This strong and durable attachment has excellent visibility and minimised lost load centre with the use of innovative double T / E profiles. The attachment is equipped with constant sideshift and bolt-on ISO adaptors for standard hook-on forks.



adaptors allow the use of hook-on forks

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A OTO mm	sideshift mm	b for forks mm	V LLC mm	ESP COG mm	weight kg
ZVP 15-AS	1500/500	1,0-1,5/500	II	980 1050	560-1710 560-1780	+/- 100	80-120	177	80 77	267 275
ZVP 20-AS	2000/500	1,6-2,0/500	II	980 1050 1150	560-1710 560-1780 560-1880	+/- 100	80-120	182	85 83 80	270 278 288
ZVP 25-AS	2500/600	2,0-2,5/600	II	980 1050 1080 1150 1150 1200 1400	560-1710 560-1780 560-1810 560-1880 400-1560 560-1930 560-2130	+/- 100	80-150	201	87 86 85 85 83 80 75	330 340 345 360 365 385 415
ZVP 30-AS	3000/500	3,0/500	III	980 1000 1050 1150 1150 1200 1300 1350 1450	560-1710 560-1730 560-1780 560-1880 420-1600 560-1930 560-2030 560-2080 560-2180	+/- 100	80-150	211	91 91 90 88 88 88 87 87 85	350 353 365 385 390 402 416 420 450
ZVP 35-AS	3500/500	3,0/600- 3,5/500	III	1150 1250 1350	560-1880 560-1980 560-2080	+/- 100	80-150	216	91 90 89	395 410 430
ZVP 40-AS	4000/500	3,5/600- 4,0/500	III	1150 1250 1350 1450	550-1860 550-1960 550-2060 550-2160	+/- 100	100-150	223	90 89 88 87	490 510 530 550
ZVP 45-AS	5000/500	4,0/600- 5,0/500	III	1250 1350 1450 1550	550-1960 550-2060 550-2160 550-2260	+/- 100	100-150	238	94 93 92 91	545 565 580 595
ZVP 48-AS	5000/600	5,0/600	III	1350 1450 1550	550-2060 550-2160 550-2260	+/- 100	100-150	248	101 100 99	610 625 640
ZVP 50 AS	5000/600	5,0/600	IV	1350 1450 1550 1800	550-2060 550-2160 550-2260 550-2510	+/- 100 +/- 100 +/- 160 +/- 160	100-160	269	102 100 99 95	715 735 755 810

- 2 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard
- protection strip as standard
- sideshift rollers as standard

- load backrest type LS-K upon request
- adaptors allow the use of hook-on forks
- no clamping allowed
- forks not included, use hook-on forks ISO 2328

DURWEN 
Forklift Attachments

More than 75 years experience