


Zinkenverstellgerät

ZVP-A

integral sideshift, ISO adaptors

The sideshifting fork positioner ZVP-A allows the use of standard forklift truck forks and is designed to allow fork spread beyond the width of the carriage. This flexible feature is ideal in situations where space is important. This strong and durable attachment has excellent visibility and minimised lost load centre with the use of innovative double T / E profiles. The attachment is equipped with integral sideshift and bolt-on ISO adaptors for standard hook-on forks. Fully open or closed no sideshift.

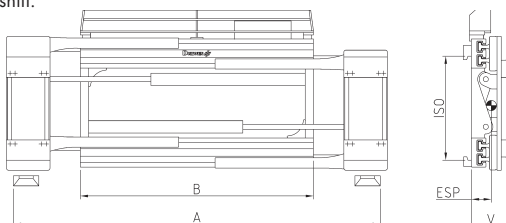

type	capacity kg/mm LC	lift truck to LC mm	ISO	B mm	A OTO mm	b for forks mm	V LLC mm	ESP COG mm	weight kg
ZVP 15-A	1500/500	1,0-1,5/500	II	980 1050	560-1710 560-1780	80-120	162	85 82	262 270
ZVP 20-A	2000/500	1,6-2,0/500	II	980 1050 1150	560-1710 560-1780 560-1880	80-120	167	90 88 85	265 273 283
ZVP 25-A	2500/600	2,0-2,5/600	II	980 1050 1080 1150 1150 1200 1400	560-1710 560-1780 560-1810 560-1880 420-1600 560-1930 560-2130	80-150	184	76 74 73 72 72 71 70	300 320 330 345 340 355 385
ZVP 30-A	3000/500	3,0/500	III	980 1000 1050 1150 1150 1200 1300 1350 1450	560-1710 560-1730 560-1780 560-1880 420-1600 560-1930 560-2030 560-2080 560-2180	80-150	194	78 77 76 75 75 74 74 74 73	330 333 340 375 370 377 391 395 425
ZVP 35-A	3500/500	3,0/600- 3,5/500	III	1150 1250 1350	560-1880 560-1980 560-2080	100-150	199	78 76 74	380 395 410
ZVP 40-A	4000/500	3,5/600- 4,0/500	III	1150 1250 1350 1450	550-1860 550-1960 550-2060 550-2160	100-150	206	78 77 76 75	470 490 510 530
ZVP 45-A	5000/500	4,0/600-5,0/500	III	1250 1350 1450 1550	550-1960 550-2060 550-2160 550-2260	100-150	221	83 81 79 78	508 530 547 565
ZVP 48-A	5000/600	5,0/600	III	1350 1450	550-2060 550-2160	100-150	231	88 86	610 640
ZVP 50-A	5000/600	5,0/600	IV	1350 1450 1550 1800	550-2060 550-2160 550-2260 550-2510	100-160	248	102 100 98 95	710 730 750 800

- 2 hydraulic functions required
- includes hoses and couplings
- protection strip as standard
- load backrest type LS-K upon request

- if no sideshift required indicate on your order
- no clamping allowed
- forks not included, use hook-on forks ISO 2328

DURWEN 
Forklift Attachments

More than 75 years experience