


Sideshifting fork positioner

ZVP-S
ISO II

constant sideshift, bolt-on forks

The sideshifting fork positioner ZVP-S is designed to allow fork spread beyond the width of the carriage. This flexible feature is ideal in situations where space is important. A huge variety of loads can be handled with extreme efficiency. This strong and durable attachment has excellent visibility and minimised lost load centre with the use of innovative double T / E profiles. The attachment is equipped with constant sideshift and bolt-on forks as standard. Clamping of goods is not allowed with this attachment.

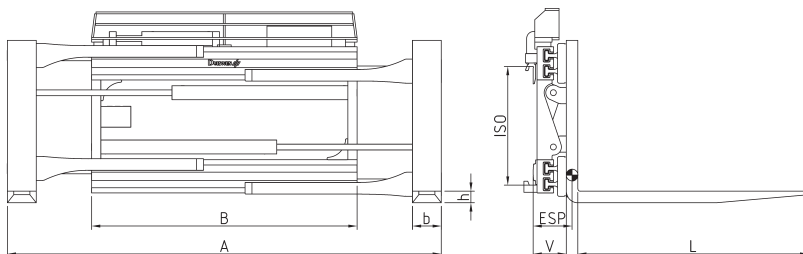


type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A OTO mm	forks b x h x L mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
ZVP 15-S*	1500/500	1,0-1,5/500	II	880 980 1050	560-1610 560-1710 560-1780	100x35x1200	+/- 75 +/- 100 +/- 100	116	192 188 186	287 297 305
ZVP 20-S	2000/500	1,6-2,0/500		980 1050 1150	560-1710 560-1780 560-1880	100x40x1200	+/- 100	121	200 198 196	320 330 340
ZVP 25-S	2500/600	2,0-2,5/600		980 1050 1080 1150 1150 1200 1400	560-1710 560-1780 560-1810 560-1880 320-1400 560-1930 560-2130	125x45x1200	+/- 100	148	228 218 217 212 208 210 195	410 420 423 435 430 444 476

- 2 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard
- sideshift rollers as standard
- with protection strip as standard
- Load backrest type LS-K upon request

*Forks longer 1600 mm
cross section changes

type	forks b x h mm
ZVP 15-S	100x40

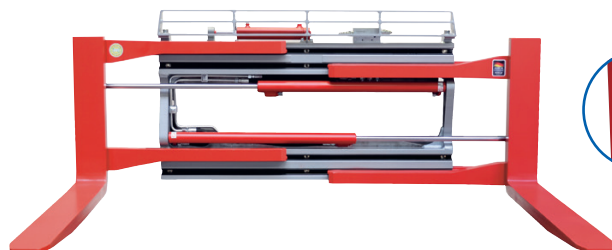

bolt-on forks

DURWEN
Forklift Attachments

More than 75 years experience