

360° rotator

adjustable and foldable sidearm

DG-ST-K
DG-S-ST-K

The **rotator DG-ST-K** has a manually foldable sidearm that provides side support to containers during the emptying process. The foldable sidearm can be adjusted for boxes from 1200 to 2250 mm box width. The arm can be manually removed and inserted on the other side of the unit. The boxes (containers) should have closed pockets for the forks in order to avoid loosening them when rotating. The unit does not clamp the container. If you need to clamp the container for safer handling, please see our type DGE box discharger or rotator type DG-BK.




image shows DG-ST-K





image shows DG-S-ST-K

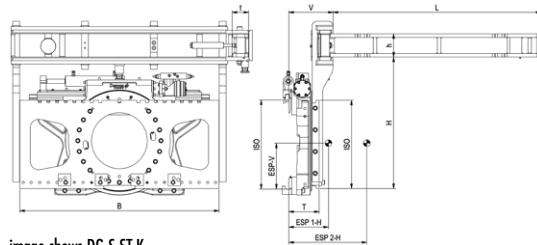

without sideshift															
type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	width B mm	arm h x t x L mm	max. torque ΔP 130 bar Nm	Height H carriage mm	overall height* mm	supported box width mm	T mm	V LLC mm	COG/ESP hor. 1/2 mm	COG/ESP vert 1/2 mm	weight kg
DG 20-ST-K	1,0-2,0/500	840	2000/500	II	1150	134x70x1200	5200	721	970	1200-2250	117	202	91/139	431	410
DG 25-ST-K	2,5/600	950	2500/600	II			9400	721	970		120	206	90/133	433	446
DG 30-ST-K	3,0/500	950	3000/500	III			9400	758	1010		130	211	93/133	439	492
DG 35-ST-K	3,0/600-3,5/500	950	3500/500	III			11700	758	1010		135	216	97/138	441	502

- 1 hydraulic function required
- includes hoses and couplings
- safety valve as standard
- quick release hooks ISO II, ISO III upon request
- forks not included
- hook-on forks reinforced for rotator use must be used

*with ISO 2328 A forks

with constant sideshift															
type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	width B mm	arm h x t x L mm	max. torque ΔP 130 bar Nm	Height H carriage mm	overall height* mm	supported box width mm	sideshift mm	T mm	V LLC mm	COG/ESP hor. 1/2 mm	weight kg
DG 20-S-ST-K	1,0-2,0/500	790	2000/500	II	1150	134x70x1200	5200	721	970	1200-2250	+/- 100	166	251	129/172	448
DG 25-S-ST-K	2,5/600	900	2500/600	II			9400	721	970			149	237	111/150	490
DG 30-S-ST-K	3,0/500	900	3000/500	III			9400	755	1010			175	256	125/160	550
DG 35-S-ST-K	3,0/600-3,5/500	900	3500/500	III			11700	755	1010			180	261	130/165	560

- 2 hydraulic functions required
- includes hoses and couplings
- safety valve as standard
- constant sideshift as standard
- quick release hooks ISO II/III/IV upon request
- forks not included
- hook-on forks reinforced for rotator use must be used

*with ISO 2328 A forks

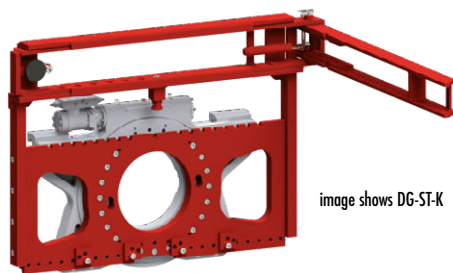


image shows DG-ST-K