


360° rotator

DG

The **rotator DG** has a cast steel frame enabling compact design. The worm gear has several teeth meshing at one time thus helping to increase the service life of the attachment. A seal fitted as standard protects the rotator against the ingress of dirt and dust.

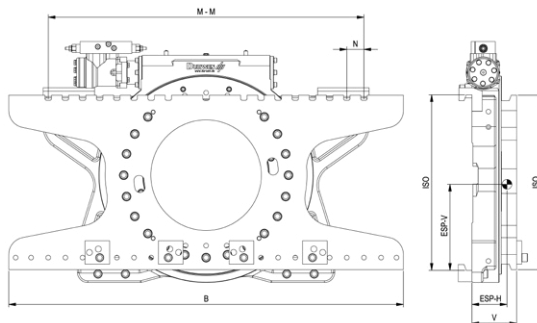

type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	width B mm	centre distance M-M mm	N mm	max. torque ΔP 130 bar Nm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg
DG 16	1,5-1,8/500	840	1600/500	II	880	260-660	50	5200	117	51	252	217
DG 20	2,0/500	840	2000/500	II	980	260-760	50	5200	117	52	250	223
DG 25	2,5/600	950	2500/600	II	1080	260-860	50	9400	120	53	274	269
DG 30	3,0/500	950	3000/500	III	1150	320-920	50	9400	130	61	285	316
DG 35	3,0/600- 3,5/500	950	3500/500	III	1150	320-920	50	11700	135	65	285	331
DG 40	3,5/600-4,0/500	1130	4000/500	III	1150	310-910	50	14000	148	66	318	455
DG 45	4,0-5,0/600	1130	5000/600	III	1350	310-1110	50	14000	148	69	316	471
DG 50	5,0/600	1150	5000/600	IV	1380	310-1110	50	14000	153	76	334	545
DG 60	6,0/600	1120	6000/600	IV	1500	310-1210	50	22000	155	73	366	706
DG 80	7,0-8,0/600	1120	8000/600	IV	1750	380-1480	50	22000	165	80	360	763
DG 100	8,0/900	1120	8000/900	IV	1750	380-1480	50	26000	178	84	376	860
DG 120	8,0/1100- 12,0/600	1120	12000/600	IV	1850	380-1580	50	26000	178	87	373	920
DG 160	14,0/600- 16,0/600	-	16000/600	Pin	2400	bolt-on	100	52000	266	140	-	3700
DG 200	18,0/600- 20,0/600	-	20000/600	Pin	2400	bolt-on	100	52000	271	143	-	3795
DG 240	16,0/1200	-	24000/600 16000/900	Pin	2400	bolt-on	100	52000	276	148	-	3860

- 1 hydraulic function required
- includes hoses and couplings
- safety valve as standard

- quick release hooks ISO II/III/IV upon request

- forks not included
- hook-on forks reinforced for rotator use must be used, see page 233
- options see page 241, 246

