


Clamp with turnable forks

DGK

integral sideshift, bolt-on forks


The clamp with turnable forks DGK allows for flexible use of forklift trucks. The fork on this attachment can be converted manually from pallet to clamp position. Loads standing close together can be clamped easily. Pallets can also be handled simply with forks in the normal position. The attachment is not recommended for heavy duty clamp jobs and clamping with forks in the pallet position is not allowed.

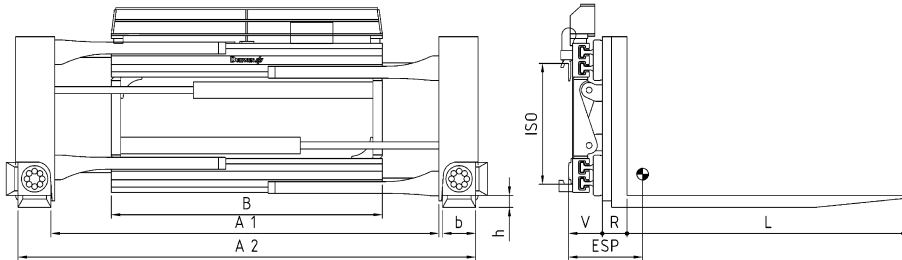

type	lift truck to LC mm	min. carriage mm	capacity on forks kg LC mm	capacity as clamp	ISO	B mm	opening range A1 ITI mm	opening range A2 ITI mm	forks b x h x L mm	R mm	V LLC mm	COG/ESP hor. mm	COG/ ESP vert. mm	weight kg	moving mass kg
DGK 20	1,5- 2,0/500	990 990	2000/500	1200/500	II	1050 1150	155-1235 340-1700	405-1485 590-1950	100x45x1200	100	107	212 201	187 190	400 410	250 269
DGK 25	2,0-2,5/600	990 990	2500/600	1750/500	II	1050 1150	130-1210 315-1675	405-1485 590-1950	125x45x1200	105	136	232 221	188 189	500 535	307 332
DGK 30	3,0/500	990 990 1150	3000/500	2000/500	III	1050 1150 1350	115-1195 300-1660 300-1860	395-1475 580-1940 580-2140	140x50x1200			250 238 230	218 222 226	530 545 560	344 369 370

- 2 hydraulic functions required (1 without sideshift)
- includes hoses and couplings
- integral sideshift as standard
- with protection strip as standard (height 150 mm above top edge of unit)
- load backrest type LS-K see page 247
- forks can be manually set to 0°/45°/90°, clamping only in 90° position
- mounting ISO A as standard, ISO B upon request
- max. fork length 1600 mm

- hydraulic fork turn upon request
one more hydraulic function required, data change, please ask
- pressure gauge with hand wheel upon request
- manual 3 stage pressure relief valve upon request
- if you do not want sideshift notify us on your order

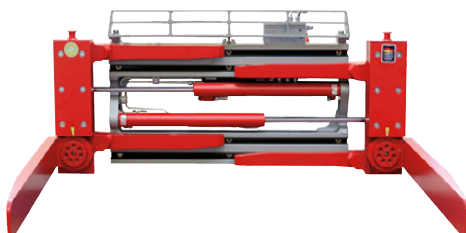

forks vertical for clamping (90° position)

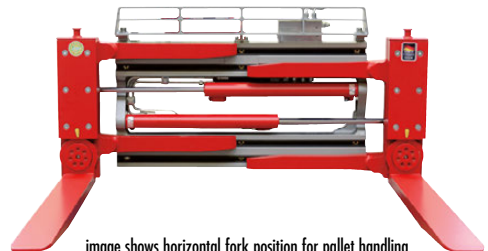


image shows horizontal fork position for pallet handling