


# Clamp with turnable forks

**DGK-S**

constant sideshift, bolt-on forks

The clamp with turnable forks **DGK** allows for flexible use of forklift trucks. The fork on this attachment can be converted manually from pallet to clamp position. Loads standing close together can be clamped easily. Pallets can also be handled simply with forks in the normal position. The attachment is not recommended for heavy duty clamp jobs and clamping with forks in the pallet position is not allowed.

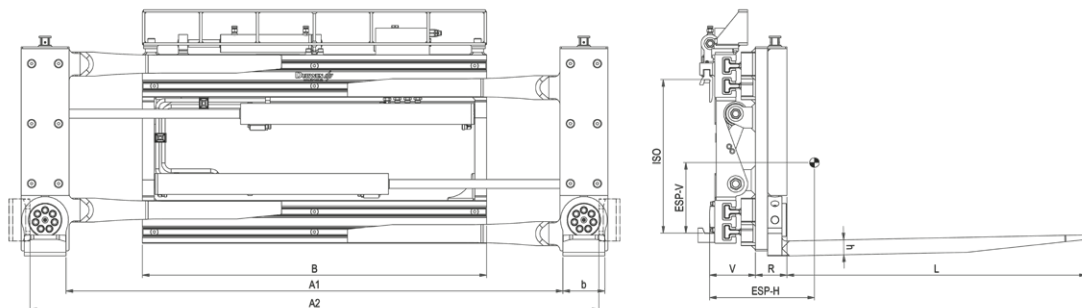

| type     | lift truck<br>to<br>LC mm | min.<br>carriage<br>mm | capacity<br>on forks<br>kg<br>LC mm | capacity<br>as clamp | ISO | B<br>mm              | opening<br>range<br>A1<br>ITL mm | opening<br>range<br>A2<br>ITL mm | forks<br>b x h x L<br>mm | sideshift<br>mm | R<br>mm | V<br>LLC<br>mm | COG/<br>ESP<br>hor.<br>mm | COG/ESP<br>vert.<br>mm | weight<br>kg      |
|----------|---------------------------|------------------------|-------------------------------------|----------------------|-----|----------------------|----------------------------------|----------------------------------|--------------------------|-----------------|---------|----------------|---------------------------|------------------------|-------------------|
| DGK 20-S | 1,5-<br>2,0/500           | 900                    | 2000/500                            | 1200/500             | II  | 1050<br>1150         | 155-1235<br>340-1700             | 405-1485<br>590-1950             | 100x45x1200              | +/- 100         | 100     | 122            | 215<br>210                | 187<br>190             | 395<br>415        |
| DGK 25-S | 2,0-2,5/600               | 900                    | 2500/600                            | 1750/500             | II  | 1050<br>1150         | 130-1210<br>315-1675             | 405-1485<br>590-1950             | 125x45x1200              |                 | 105     | 153            | 231<br>225                | 183<br>193             | 515<br>550        |
| DGK 30-S | 3,0/500                   | 900                    | 3000/500                            | 2000/500             | III | 1050<br>1150<br>1350 | 115-1195<br>300-1660<br>300-1860 | 395-1475<br>580-1940<br>580-2140 | 140x50x1200              |                 |         |                | 252<br>247<br>236         | 222<br>225<br>228      | 545<br>560<br>575 |

- 2 hydraulic functions required
- includes hoses and couplings
- with pressure relief valve on the clamp function as standard
- constant sideshift as standard
- sideshift rollers as standard
- with protection strip as standard (height 150 mm above top edge of unit)
- load backrest type LS-K see page 247

- forks can be manually set to 0°/45°/90°, clamping only in 90° position
- max. fork length 1600 mm
- mounting ISO A as standard, ISO B upon request
- pressure gauge with hand wheel (up to 160 bar) upon request
- manual 3 stage pressure relief valve upon request
- hydraulic fork turn upon request
- one more hydraulic function required, data change, please ask

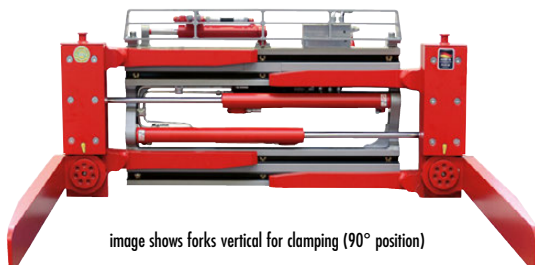


image shows forks vertical for clamping (90° position)

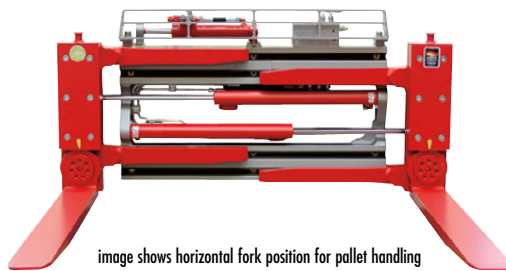


image shows horizontal fork position for pallet handling