


360° rotator hydraulic claws

DG-BK

The rotator **DG-BK** has a bolt-on stabilizing arm and claws to fix a box (container) on the forks. This is a suitable solution whenever the box needs to be rotated 180° for emptying bulk material. The arm and the claws are hydraulically driven and secure the box onto the forks.

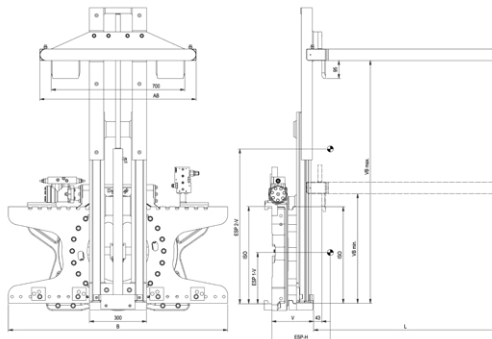

type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	width B mm	arm AB x L mm	max. torque ΔP 130 bar Nm	VB ISO A mm	VB ISO B mm	V LLC mm	COG/ESP hor. mm	OG/ESP vert. 1/2 mm	weight kg
DG 20-BK	1,0-2,0/500	840	2000/500	II	980	820 x 1200	5200	650-1350	726-1426	206	142	352/522	378
DG 25-BK	2,0-2,5/600	950	2500/600	II	1080		9400		726-1426	209	135	358/509	430
DG 30-BK	3,0/500	950	3000/500	III	1150		9400		777-1477	219	136	559/494	480
DG 35-BK	3,0/600-3,5/500	950	3500/500	III	1150		11700		777-1477	224	141	364/499	495

- 2 hydraulic functions required
- includes hoses and couplings
- forks not included
- quick release hooks ISO II/III upon request
- solenoid valve upon request (12 V, 24 V, 48 V, 80 V - please specify)
- hook-on forks reinforced for rotator use must be used

type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	width B mm	arm AB x L mm	max. torque ΔP 130 bar Nm	VB ISO A mm	VB ISO B mm	sideshift mm	V LLC mm	COG/ESP hor. mm	OG/ESP vert. 1/2 mm	weight kg
DG 20-S-BK	1,0-2,0/500	790	2000/500	II	980	820 x 1200	5200	650-1350	726-1426	+/- 100	256	174	349/504	417
DG 25-S-BK	2,0-2,5/600	900	2500/600	II	1080		9400		726-1426		238	160	361/498	475
DG 30-S-BK	3,0/500	900	3000/500	III	1150		9400		777-1477		264	165	361/481	545
DG 35-S-BK	3,0/600-3,5/500	900	3500/500	III	1150		11700		777-1477		269	170	366/486	560

- 3 hydraulic functions required
- includes hoses and couplings
- hook-on forks reinforced for rotator use must be used
- quick release hooks ISO II/III upon request
- solenoid valve upon request (12 V, 24 V, 48 V, 80 V - please specify)
- forks not included
- for special arm sizes, please ask

