


360° rotator

Fishing industry version

DG-F

The **Rotator DG-F** has a cast steel frame enabling a compact design. The worm gear has several teeth meshing at one time thus helping to increase the service life of the attachment. A seal fitted as standard protects the rotator against the ingress of dirt and dust. This version includes multi layer surface protection, hot dip galvanized parts, sealed bolts, external lubricant access and is therefore perfectly suited for the fishing and port industries.

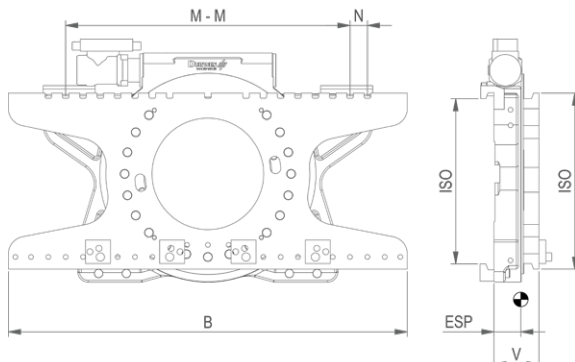

type	lift truck capacity to	min. carriage mm	capacity kg/mm LC	ISO	width B mm	max. torque ΔP 100 bar Nm	centre distance M - M mm	N mm	V LLC mm	ESP/COG hor. mm	ESP/COG vert. mm	weight kg
DG 16-F	1,5-1,8/500	840	1600/500	II	880	4000	260-660	50	117	51	252	217
DG 20-F	2,0/500	840	2000/500	II	980	4000	260-760	50	117	52	250	223
DG 25-F	2,5/600	950	2500/600	II	1080	7300	260-860	50	120	53	274	285
DG 30-F	3,0/500	950	3000/500	III	1150	7300	320-920	50	130	61	285	335
DG 35-F	3,0/600-3,5/500	950	3500/500	III	1150	11700	320-920	50	135	65	285	350

- 1 hydraulic function required
- includes hoses and couplings

- safety valve as standard
- forks not included

- hook-on forks reinforced for rotator use must be used
- sideshift upon request only
- colour dark grey

