


360° rotator

without sideshift, hook-on forks

DG-G

The rotator DG-G has a cast steel frame enabling compact design. The worm gear has several teeth meshing at one time thus helping to increase the service life of the attachment. A seal fitted as standard protects the rotator against the ingress of dirt and dust.

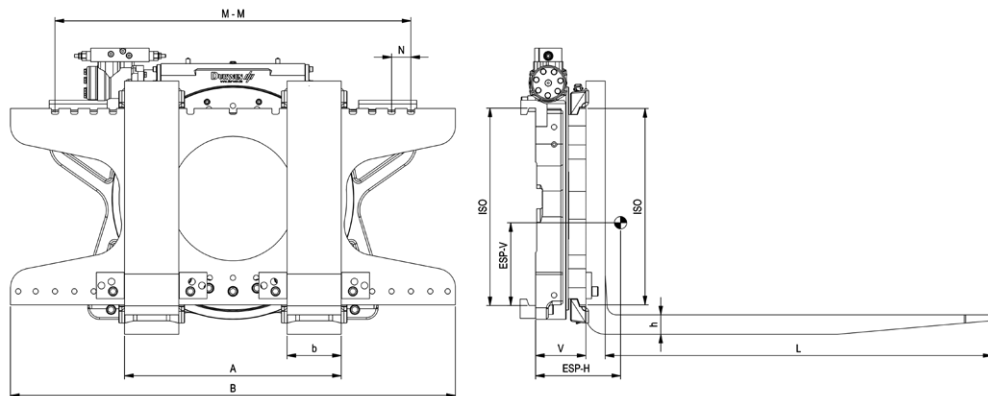

type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	width B mm	centre distance M-M mm	N mm	fork position A OTO mm	forks b x h x L mm	max. torque ΔP 130 bar Nm	V LLC mm	ESP/ COG hor. mm	ESP/ COG vert. mm	weight kg
DG 16-G	1,5-1,8/500	840	1600/500	II	880	260-660	50	540	80x40x1200	5200	117	175	192	304
DG 20-G	2,0/500	840	2000/500	II	980	260-760	50	560	100x40x1200	5200	117	195	183	328
DG 25-G	2,5/600	950	2500/600	II	1080	260-860	50	560	100x45x1200	9400	120	190	210	378
DG 30-G	3,0/500	950	3000/500	III	1150	320-920	50	520	100x45x1200	9400	130	184	223	439
DG 35-G	3,0/600-3,5/500	950	3500/500	III	1150	320-920	50	545	125x45x1200	11700	135	209	213	485
DG 40-G	3,5/600-4,0/500	1130	4000/500	III	1150	310-910	50	535	125x45x1200	14000	148	181	254	606
DG 45-G	4,0-5,0/600	1130	5000/600	III	1350	310-1110	50	560	150x60x1200	14000	148	224	232	714
DG 50-G	5,0/600	1150	5000/600	IV	1380	310-1110	50	560	150x60x1200	14000	153	213	251	830
DG 60-G	6,0/600	1120	6000/600	IV	1500	310-1210	50	560	150x60x1200	22000	155	190	288	993
DG 80-G	7,0-8,0/606	1120	8000/600	IV	1750	380-1480	50	580	200x60x1200	22000	165	214	273	1175

- 1 hydraulic function required
- includes hoses and couplings
- safety valve as standard

- quick release hooks ISO II/III/IV upon request

- hook-on forks reinforced for rotator use included
- options see page 241, 246

