
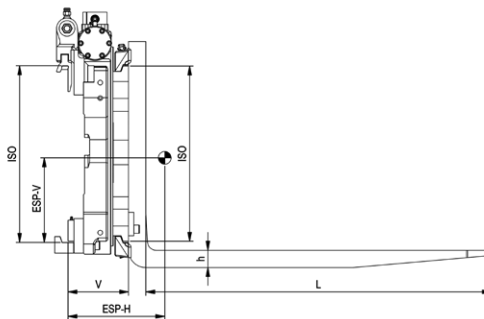


Sideshifting 360° rotator

constant sideshift, hook-on forks

DG-GS

The rotator **DG-GS** has a cast steel frame enabling compact design. The worm gear has several teeth meshing at one time thus helping to increase the service life of the attachment. A seal fitted as standard protects the rotator against the ingress of dirt and dust. DG-GS is equipped with constant sideshift +/-100 mm.

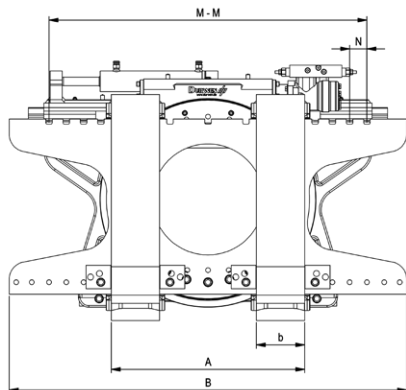

type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	width B mm	centre distance M-M mm	N mm	fork position A OTO mm	forks b x h x L mm	max. torque ΔP 130 bar Nm	sideshift mm	V LLC mm	ESP/ COG hor. mm	ESP/ COG vert. mm	weight kg
DG 16-GS	1,5-1,8/500	790	1600/500	II	880	260-660	50	540	80x40x1200	5200	+/- 100	166	199	206	351
DG 20-GS	2,0/500	790	2000/500	II	980	260-760	50	560	100x40x1200	5200		166	219	197	375
DG 25-GS	2,5/600	900	2500/600	II	1080	260-860	50	560	100x45x1200	9400		149	199	229	422
DG 30-GS	3,0/500	900	3000/500	III	1150	320-920	50	520	100x45x1200	9400		175	203	248	498
DG 35-GS	3,0/600- 3,5/500	900	3500/500	III	1150	320-920	50	545	125x45x1200	11700		180	227	238	539
DG 40-GS	3,5/600- 4,0/500	980	4000/500	III	1150	310-910	50	535	125x45x1200	14000		193	198	275	701
DG 45-GS	4,0-5,0/600	980	5000/600	III	1350	310-1110	50	560	150x60x1200	14000		193	240	253	808
DG 50-GS	5,0/600	1010	5000/600	IV	1380	310-1110	50	560	150x60x1200	14000		205	233	286	952
DG 60-GS	6,0/600	1100	6000/600	IV	1500	310-1210	50	560	150x60x1200	22000		229	225	322	1192
DG 80-GS	7,0-8,0/606	1100	8000/600	IV	1750	380-1480	50	580	200x60x1200	22000		239	250	305	1375

- 2 hydraulic functions required
- includes hoses and couplings

- safety valve as standard
- constant sideshift as standard

- options see page 241, 246
- quick release hooks ISO II/III/IV upon request
- hook-on forks reinforced for rotator use included

