


Sideshifting 360° rotator

constant sideshift

DG-S

The rotator **DG-S** has a cast steel frame enabling compact design. The worm gear has several teeth meshing at one time thus helping to increase the service life of the attachment. A seal fitted as standard protects the rotator against the ingress of dirt and dust. DG-S is equipped with constant sideshift ± 100 mm.


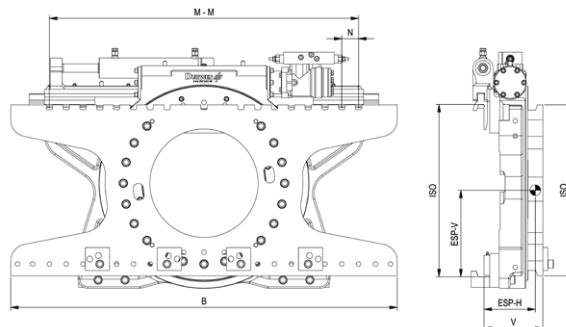


type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	width B mm	centre distance M-M mm	N mm	max. torque ΔP 130 bar Nm	sideshift mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg
DG 16-S	1,5-1,8/500	790	1600/500	II	880	260-660	50	5200	± 100	166	85	261	264
DG 20-S	2,0/500	790	2000/500	II	980	260-760		5200		166	87	260	270
DG 25-S	2,5/600	900	2500/600	II	1080	260-860		9400		149	72	290	314
DG 30-S	3,0/500	900	3000/500	III	1150	320-920		9400		175	90	308	375
DG 35-S	3,0/600- 3,5/500	900	3500/500	III	1150	320-920		11700		180	92	308	385
DG 40-S	3,5/600- 4,0/500	980	4000/500	III	1150	310-910		14000		193	95	335	550
DG 45-S	4,0-5,0/600	980	5000/600	III	1350	310-1110		14000		193	97	332	565
DG 50-S	5,0/600	1010	5000/600	IV	1380	310-1110		14000		205	107	369	668
DG 60-S	6,0/600	1100	6000/600	IV	1500	310-1210		22000		229	118	391	883
DG 80-S	7,0-8,0/600	1100	8000/600	IV	1750	380-1480		22000		239	128	386	968
DG 100-S	8,0/900	1100	8000/900	IV	1750	380-1480		26000		251	130	399	1020
DG 120-S	8,0/1100- 12,0/600	1100	12000/600	IV	1850	380-1580		26000		251	133	396	1128

- 2 hydraulic functions required
- includes hoses and couplings
- safety valve as standard

- constant sideshift as standard
- options see page 241, 246

- quick release hooks ISO II/III/IV upon request
- forks not included
- hook-on forks reinforced for rotator use must be used, see page 234

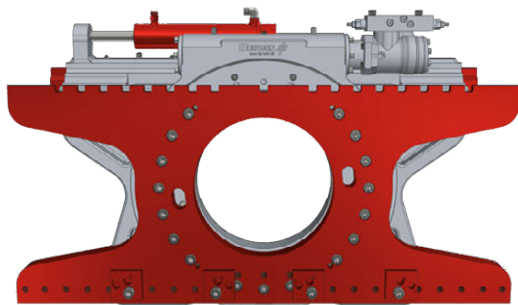

3D product video

DURWEN 
Forklift Attachments

PL 01-2026