


Revolving bale clamp

360° rotation

DPBK

The revolving bale clamp **DPBK** is made with double T profile guides. This type of profile supports excellent visibility through the clamp. The smooth and flush arms allow for dense stacking of bales. Due to the combined 360° direct drive rotator it can also turn clamped bales e.g. for feeding production lines.

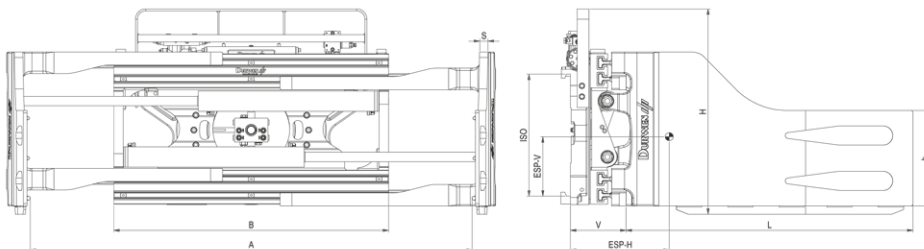

type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	opening range A ITI mm	height H mm	length L mm	S (max)* mm	H mm	V LLC mm	COG/ ESP hor. mm	COG/ ESP vert. mm	weight kg	moving mass kg
DPBK 20	1,5-2,0/500	840	1500/500	II	1050	520-1770	350	1000	30 (92)	770	198	250	235	610	462
DPBK 25	2,0-2,5/600	950 950	2000/500	II	1050 1150	560-1760 600-1950	400	1000	30 (92)	860	223	249 245	279 275	776 809	542 573
DPBK 30	3,0/500	950 950 950 950	2200/500	III	1150 1150 1350 1350	570-1870 560-1860 530-2130 520-2120	400	1000 1200 1000 1200	35 (98)	860	223	253 299 254 294	278 271 278 272	843 888 868 913	604 649 629 674
DPBK 35	3,0/600- 3,5/500	950 950	2500/500	III	1150 1350	560-1860 520-2120	450	1200	40 (110)	860	233	323 313	265 265	927 972	693 734
DPBK 40	3,5-4,0/600	1130	2900/500	III	1350	600-2250	450	1200	40 (110)	980	263	298	305	1268	905
DPBK 45	4,5-5,0/500	1130	3500/500	III	1350	520-2100	450	1200	40 (116)	980	263	304	305	1289	927
DPBK 50	5,0/600	1150	3500/600	IV	1350	590-2100	460	1200	40 (116)	1025	253	298	317	1397	1028
DPBK 60	6,0/600	1120	4200/600	IV	1350	590-2100	460	1200	40 (116)	1160	256	280	341	1505	1320
DPBK 80	7,0-8,0/600	1120	4000/800	IV	1550	550-2150	500	1600	50 (133)	1160	298	393	337	2168	1680
DPBK 100	8,0/900	1120	5000/800	IV	1650	700-2500	500	1600	50 (137)	1145	320	400	344	2445	1913

- 2 hydraulic functions required
(3 hydraulic functions with constant sideshift)

- includes hoses and couplings

- wear strips welded under arms as standard

- standard with protection strip type SB-DG

(does not rotate, height = H, for exact type see page 246)


- cylinder protection upon request ISO II/III/IV upon request

- wear strips under frame ISO II/III/IV upon request

- constant sideshift see page 248

- other arm lengths upon request

* including rebar and pre-tension

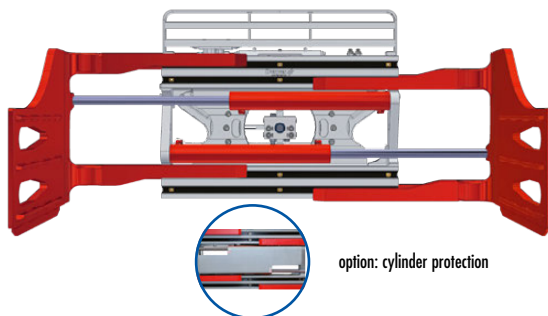

option: cylinder protection



DURWEN 
Forklift Attachments

PL 01-2026