


Double fork positioner for 1-2 pallets

DPK

The double fork positioner **DPK** can pick up one or two pallets through hydraulic fork positioning. The distance between the pallets can be reduced to zero. The strong frame construction maximises service life and safe working. The compact design gives excellent visibility.

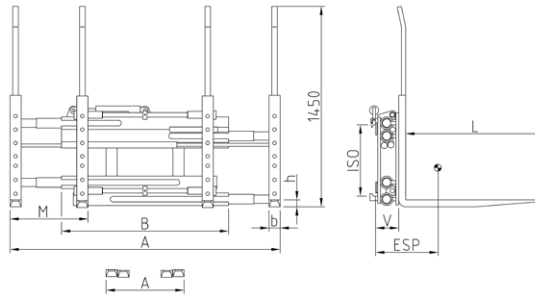

type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	opening range A OTO mm	M mm	forks b x h x L mm	sideshift mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg
DPK 16	1,5-1,8/600	920	1600/600	II	1050	560-1790	560	80x35x1200	+/- 100	165	228	244	449
DPK 22	2,0-2,5/500	920	2200/600	II	1200	560-1940	560	80x40x1200	+/- 100	166	238	241	497
DPK 22-2	2,0-2,5/500	920	2200/600	II	1200	660-2140	660	80x40x1200	+/- 100	166	233	235	507
DPK 25	2,5/600	920	2500/600	II	1200	560-1940	560	80x45x1200	+/- 100	166	250	235	517
DPK 25-2	2,5/600	920	2500/600	II	1200	660-2140	660	80x45x1200	+/- 100	166	246	230	527
DPK 25-3	2,5/600	1040	2500/600	II	1300	560-2040	560	80x45x1200	+/- 100	166	240	225	559
DPK 30	3,0/500	920	2600/600	III	1200	560-1940	560	80x45x1200	+/- 100	166	247	249	519
DPK 30-2	3,0/500	920	2600/600	III	1200	660-2140	660	80x45x1200	+/- 100	166	242	244	529
DPK 30-3	3,0/500	1040	2600/600	III	1300	560-2040	560	80x45x1200	+/- 100	166	238	239	561
DPK 32	3,5/500	980	2800/600	III	1200	560-1940	560	80x50x1200	+/- 100	182	231	250	629
DPK 32-2	3,5/500	1150	2800/600	III	1300	660-2140	660	80x50x1200	+/- 100	182	227	245	674
DPK 32-3	3,5/500	1150	2800/600	III	1300	560-2040	560	80x50x1200	+/- 100	182	222	240	684
DPK 35	3,0/600-4,0/500	980	3200/600	III	1200	560-1940	560	80x60x1200	+/- 100	182	248	243	649
DPK 35-2	3,0/600-4,0/500	1150	3200/600	III	1300	660-2140	660	80x60x1200	+/- 100	182	243	238	694
DPK 35-3	3,0/600-4,0/500	1150	3200/600	III	1300	560-2040	560	80x60x1200	+/- 100	182	238	233	704
DPK 40	4,0-5,0/600	1150	4500/600	III	1400	560-1940	560	80x60x1200	+/- 150	195	243	241	721
DPK 40-2	4,0-5,0/600	1150	4500/600	III	1400	660-2140	660	80x60x1200	+/- 150	195	240	239	751
DPK 40-3	4,0-5,0/600	1150	4500/600	III	1400	560-2040	560	80x60x1200	+/- 150	195	238	237	731
DPK 50	5,0-6,0/600	1520	5500/600	IV	1420	560-1940	560	80x60x1200	+/- 160	171	198	315	868

- 2 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard
- optional with high visibility load backrest ISO II/III upon request / ISO IV not available
- no sideshift ISO II/III, ISO IV upon request data change, please ask
- automatic lubrication system: upon request
- single pair control upon request
- scanner holder upon request

