


Double pallet handler beverage-PremiumCam

DPK-SF

The **double pallet handler beverage-PremiumCam** is based on a standard DPK unit. The patented extra equipment of three cameras integrated into the forks (SideCam) enables a safe and fast entering of the load. The cameras are positioned in a way that they are protected and at the same time allow for handling pallets at maximum closed fork position. Built-in sensors enable automatic switching to a camera integrated in the fork tip (FrontCam), which can display a safe loading process at the front.

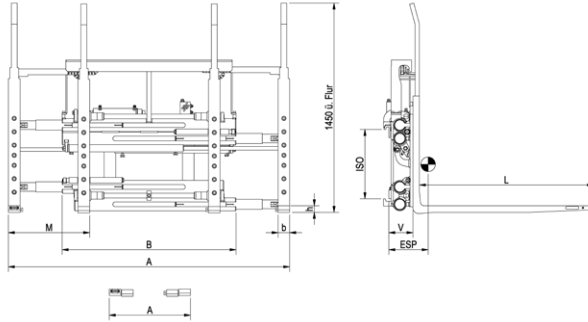

Beverage-PremiumCam without FrontCam													
type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	opening range A OTO mm	M/N/O mm	forks b x h x L mm	sideshift mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg
DPK 25-SF-GPC	2,5/600	920	2500/600	II	1200	560-1940	560	80x45x1200	+/- 100	165	255	235	570
DPK 30-SF-GPC	3,0/500	920	2600/600	III	1200	560-1940		80x45x1200		165	255	249	575
DPK 35-SF-GPC	3,0/600-4,0/500	980	3200/600	III	1200	560-1940		80x60x1200		182	250	243	720
DPK 40-SF-GPC	4,0-5,0/600	1160	4500/600	III	1400	560-1940		80x60x1200		192	245	241	805

Beverage-PremiumCam with FrontCam													
type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	opening range A OTO mm	M/N/O mm	forks b x h x L mm	sideshift mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg
DPK 25-SF-GPCF	2,5/600	920	2500/600	II	1200	560-1940	560	80x45x1200	+/- 100	165	255	235	570
DPK 30-SF-GPCF	3,0/500	920	2600/600	III	1200	560-1940		80x45x1200		165	255	249	575
DPK 35-SF-GPCF	3,0/600-4,0/500	980	3200/600	III	1200	560-1940		80x60x1200		182	250	243	720
DPK 40-SF-GPCF	4,0-5,0/600	1160	4500/600	III	1400	560-1940		80x60x1200		192	245	241	805

- 2 hydraulic functions required
- includes hoses and couplings

- delivery includes mast cable, mounting kit and monitor
- constant sideshift as standard
- automatic lubrication system: upon request

