


Triple fork positioner for 1-2-3 pallets

DRPK

The triple fork positioner can pick up one, two or three pallets through hydraulic fork positioning. The distance between the pallets can be reduced to zero. The strong frame construction maximises service life and safe working. Sideshift is fitted as standard.

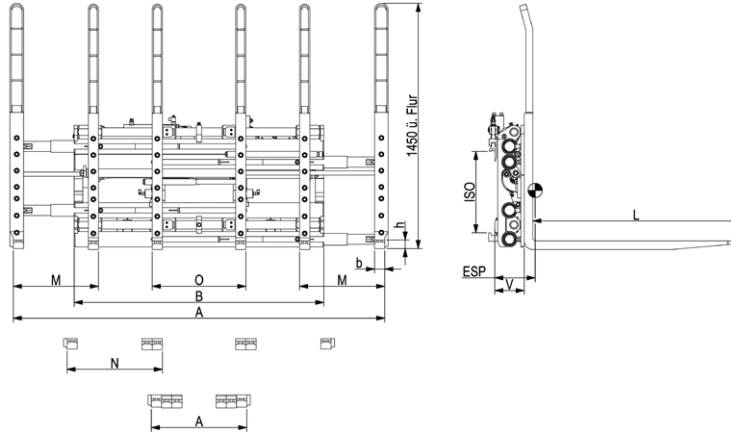

type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	opening range A OTO mm	M/N/O mm	forks b x h x L mm	sideshift mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg
DRPK 25	2,5/600	1150	2500/600	II	1630	560-2285	500/560/550	60x45x1200	+/- 100	171	220	274	716
DRPK 30	3,0-3,5/600	1150	3000/600	III	1465 1630 1796	560-2240 560-2285 560-2450	530/590/550 500/560/550 500/560/550	60x45x1200		171	222 220 218	272 274 277	701 716 738
DRPK 45	4,0-5,0/600	1150 1150 1350 1350	3800/600	III	1630 1796 2006 2286	560-2285 560-2450 560-2660 560-2940	500/560/550	60x50x1200		171	231 229 225 220	270 273 276 279	738 762 817 882
DRPK 50	5,0/600	1750	4500/600	IV	1980	560-2760	510/570/550	60x65x1200	+/- 150	233	235	317	1140

- 2 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard

- optional with high visibility load backrest upon request / ISO IV not available
- no sideshift ISO II/III, ISO IV upon request data change, please ask

- automatic lubrication system: upon request
- single pair control upon request
- scanner holder upon request



3D product video