


# Revolving fork clamp 360°

bolt-on forks

**DUZ**  
**ISO II/III**

The revolving fork clamp **DUZ** is a multi-purpose clamp with 360° continuous rotation. Loads can be carried on forks or clamped between them. Revolving fork clamps are perfect for emptying containers, boxes, bins etc.. The unit features bolt-on forks and a direct drive for rotation.

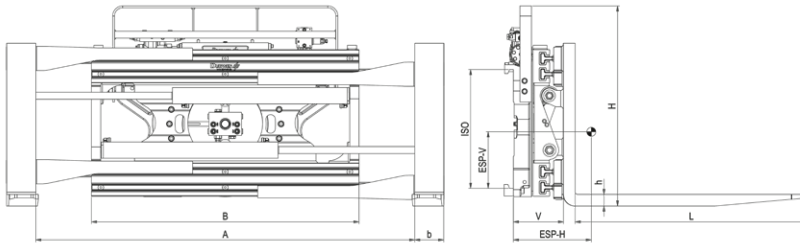


type	lift truck to LC mm	min. carriage mm	capacity on forks kg LC mm	capacity as clamp	ISO	B mm	opening range A ITI mm	forks b x h x L mm	H mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg
DUZ 15	1,5-2,0/500	840 840	1900/500	1400/500	II	980 1050	360-1510 360-1580	100x40x1200	770	182	190 188	211 213	485 495
DUZ 25	2,0-2,5/600	950	2500/600	1900/500	II	980	310-1460	125x50x1200	860	216	216	238	655
		1050				310-1530	218				240	665	
		1150				310-1630	220				241	680	
		1250				310-1730	221				242	695	
		1350				310-1830	222				243	710	
DUZ 30	3,0/500	950	3000/500	2400/500	III	980	310-1460	125x50x1200	860	216	222	240	660
		1050				310-1530	220				242	670	
		1150				310-1630	219				243	680	
		1250				310-1730	217				243	700	
		1350				310-1830	216				244	715	
DUZ 35	3,0/600- 3,5/500	950	3500/500	2700/500	III	1150	260-1580	150x50x1200	860	221	235	239	740
		950				260-1780	233				238	765	
DUZ 40	3,5-4,0/600	1130	4100/500	2900/500	III	1250	250-1660	150x50x1200	980	241	218	280	955
		1130				250-1760	215				279	975	
		1130				250-1860	210				277	995	
DUZ 45	4,5-5,0/500	1130	4500/600	3500/600	III	1250	250-1660	150x60x1200	980	251	237	272	1030
		1130				250-1760	235				274	1045	
		1130				250-1860	232				278	1068	
DUZ 48	5,0/600	1130	4800/600	3500/600	III	1350	250-1700	150x70x1200	980	261	251	270	1145

- 2 hydraulic functions required
- includes hoses and couplings
- 360° endless rotation
- direct drive due to worm gear
- features bolt-on forks as standard
- toe-in on forks as standard

- with pressure relief valve on the clamp function as standard
- with protection strip as standard type SB-DG (does not rotate)
- cylinder protection upon request
- solenoid valve upon request  
(12 V, 24 V, 48 V, 80 V - please specify)

- pressure gauge + pressure manually adjustable (up to 160 bar) upon request
- slip-on arms see page 244-245
- foundry/fishing version see page 240-241

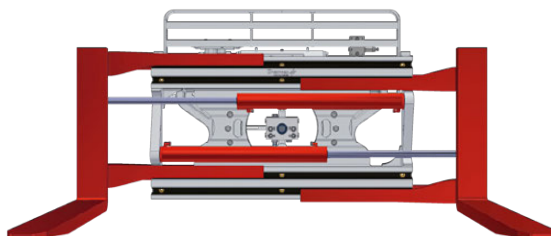

bolt-on forks



option: cylinder protection

