



Revolving fork clamp 360°

bolt-on forks, constant sideshift



The rotating fork clamp **DUZ-S** is a universal attachment and can be rotated endlessly 360 degrees. The load can be picked up on or between the forks (clamped). In addition, the rotating fork clamp is used for emptying wire mesh boxes, crates and other containers. The attachment has a constant sideshift.

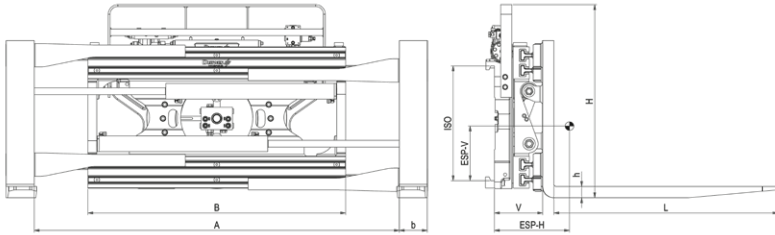


type	lift truck to LC mm	min. carriage mm	capacity on forks kg LC mm	capacity as clamp kg LC mm	ISO	B mm	opening range A III mm	forks b x h x L mm	sideshift mm	H mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg																							
DUZ 15-S	1,5-2,0/500	790 790	1900/500	1400/500	II	980 1050	360-1510 360-1580	100x40x1200	+/- 100	770	235	220 218	220 222	525 535																							
DUZ 25-S	2,0-2,5/600	900 900 900 900 900	2500/600	1900/500	II	980 1050 1150 1250 1350	310-1460 310-1530 310-1630 310-1730 310-1830	125x50x1200		860	247	220 215 205 204 203	248 250 251 252 253	700 710 725 740 755																							
		DUZ 30-S				3,0/500	900 900 900 900			3000/500		2400/500	III	980 1050 1150 1250 1350	310-1460 310-1530 310-1630 310-1730 310-1830	125x50x1200	860	257	220 215 205 204 203	255 256 257 258 260	725 735 750 760 775																
							DUZ 35-S							3,0/600- 3,5/500	900 900				3500/500	2700/500	III	1150 1350	260-1580 260-1780	150x50x1200	860	267	225 220	250 255	805 835								
															DUZ 40-S							3,5-4,0/600	980 980 980				4100/500	2900/500	III	1250 1350 1450	250-1660 250-1760 250-1860	150x50x1200	980	289	243 240 230	293 295 296	1050 1065 1085
																							DUZ 45-S							4,5-5,0/500	980 980 980				4500/600	3500/600	III
DUZ 48-S	5,0/600	980	4800/600	3500/600	III	1350	250-1700	150x70x1200		980	309	255 284	1240																								

- 3 hydraulic functions required
- includes hoses and couplings
- 360° endless rotation
- direct drive due to worm gear

- constant sideshift as standard
- features bolt-on forks as standard
- toe-in on forks as standard
- with pressure relief valve on the clamp function as standard
- with protection strip as standard type SB-DG (does not rotate)
- cylinder protection upon request

- solenoid valve upon request (12 V, 24 V, 48 V, 80 V - please specify)
- Pressure gauge + pressure manually adjustable (up to 160 bar) upon request
- slip-on arms see page 244-245
- foundry/fishing version see page 240-241

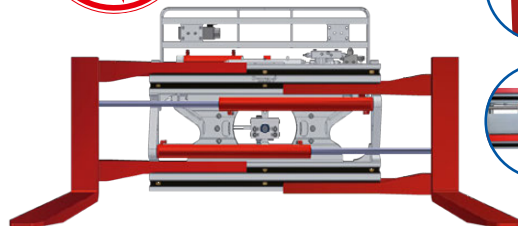

bolt-on forks



option: cylinder protection