


Appliance clamp, articulating arms

integral sideshift, with vertical and horizontal adjustable arms

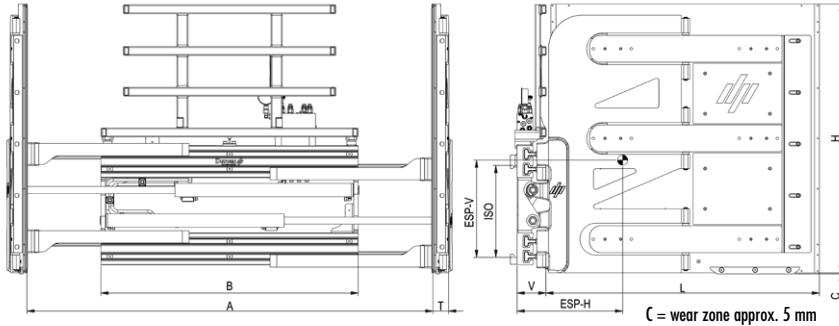

type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	opening range A ITI mm	arm height H mm	arm length* L mm	arm thickness T mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg	moving mass kg
KHG 16	2,5-3,0/600	990	1600/600	II/III	1350	430-2020	1200	1220	65	138	450	429	925	659
		990			1350	560-2210		1220			450	427	930	661
		890			1450	430-2120		1220			440	425	940	659
		890			1450	430-2120		1380			460	428	995	726
		890			1450	560-2310		1220			440	427	945	661
		890			1450	560-2310		1380			460	430	1000	731
		1100			1550	430-2220		1220			435	425	950	659
		1100			1550	430-2220		1380			455	427	1010	726
		1100			1550	560-2410		1220			435	426	955	661
		1100			1550	560-2410		1380			455	429	1015	731
		980			1750	430-2420		1220			430	420	980	659
		980			1750	430-2420		1380			450	422	1040	726
		980			1750	560-2610		1220			430	421	985	661
		980			1750	560-2610		1380			450	424	1045	731

- 2 hydraulic functions required
- includes hoses and couplings
- pressure gauge as standard
- with pressure relief valve on the clampfunction as standard
- with protection strip as standard
- RiGu black as standard surface

- other surfaces see page 252
- clamp force options see page 249
- other arm dimensions upon request
- constant sideshift upon request
- ISO type B mounting upon request

* arm length equals the usable length from the arm tip to the load contact on the clamp body, contact plate length - 20 mm

